

BEST AVAILABLE COPY



04 MAR 2004  
/GB 2003 / 0 0 3 6 5 9



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales NP10 8QQ  
RECD 25 SEP 2003  
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Stephen Hordley*

Dated

15 September 2003

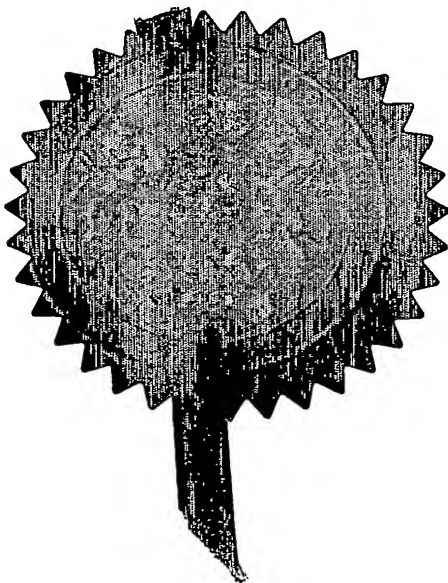



# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

14 SEP 2002

1. Your reference

GBPO268

2. Patent application number

(The Patent Office will fill in this part)

0221346.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Dyson Limited  
Tetbury Hill  
Malmesbury  
Wiltshire  
SN16 ORP

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UK

8061301 001

4. Title of the invention

A Cleaning Appliance

5. Name of your agent (if you have one)

Gillian R Smith, John D Cage

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Dyson Limited  
Intellectual Property Dept  
Tetbury Hill  
Malmesbury  
Wiltshire  
SN16 ORP  
UK

Patents ADP number (if you know it)

826829 4001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	21
Claim(s)	04 <i>DM</i>
Abstract	01
Drawing(s)	16 + 16

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	1 ✓
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature *John D CAGE*  
John D CAGE

Date  
13 September, 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Sally Hutchings  
01666 828459

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

A Cleaning Appliance

This invention relates to a cleaning appliance, such as a vacuum cleaner.

5

Cleaning appliances such as vacuum cleaners are well known. The majority of vacuum cleaners are either of the 'upright' type or of the 'cylinder' type. An example of a cylinder vacuum cleaner manufactured by Dyson Limited under the name DC05 ("DC05" is a trade mark of Dyson Limited) is shown in Figure 1.

10

Cylinder vacuum cleaners (called canister or barrel cleaners in some countries) generally comprise a main body 10 which contains separating apparatus 11 for separating dirt and dust from an incoming dirty airflow and for collecting the separated material. The separating apparatus is usually a filter bag or a cyclonic separator. The dirty airflow is introduced to the main body 10 via a hose 15 and a wand 16 assembly which is connected to the main body 10. The main body 10 of the cleaner is dragged along by the hose 15 as a user moves around a room. A cleaning tool 20 is attached to the remote end of the hose 15 and wand 16 assembly. The wand 16 usually comprises a set of two, or sometimes more, telescopic tubes which can be adjusted to a length which is matched to the physical requirements of a user.

15

20

It is known to provide a socket 18 on the main body of the vacuum cleaner and a hook 17 on the wand so that a user can 'park' the wand in the socket 18. When the wand is parked, it is positioned substantially vertically so that it can be readily grasped by a user.

25

In this manner, a user does not need to bend down to retrieve the wand from the floor. A user may also choose to park the wand in this manner when the vacuum cleaner is stored. Although this feature is useful, the vacuum cleaner and wand are still quite cumbersome to carry from one place to another and the cleaner is not particularly easy to store in places of limited space.

30

The present invention seeks to provide a surface treating machine which is more convenient to store and/or to carry.

5 Accordingly, a first aspect of the present invention provides a cleaning appliance of the cylinder type comprising a main body and a wand assembly through which, in use, fluid can be carried to/from the main body, the main body and wand comprising retaining means for retaining the wand on the main body in a position in which a substantial part of the wand lies alongside the main body.

10 This allows the machine to be more easily stored since the wand is neatly and securely stored on the main body of the machine.

Preferably, the wand assembly comprises a plurality of telescopically connected tubes which can be operated between a retracted state and an extended state. More preferably  
15 a substantial part, or substantially all, of the length of the wand, in the retracted state, lies alongside the main body when the wand is retained on the main body.

Preferably the retaining means retains the wand on the upper face of the main body, although, of course, the wand can be stored on other parts of the main body such as the  
20 sides of the main body.

Preferably the main body comprises a channel for receiving the wand and the retaining means are located in the channel. Where the main body comprises two generally cylindrical containers lying next to one another, the channel for receiving the wand can  
25 comprise the space between the cylindrical containers.

Preferably the channel has a sufficient depth that the wand lies substantially flush with the surface of the main body when the wand is retained on the main body.

Preferably the wand assembly has a handle for allowing a user to lift the main body when the wand assembly is retained on the main body. More preferably, the handle is the same handle by which a user, during normal use, can manipulate the wand. It is convenient for the handle to extend in a direction which is substantially parallel to the longitudinal axis of the wand so as to provide longitudinally offset positions for lifting the main body and for manipulating the wand.

Preferably a release member for releasing the wand from the main body is also arranged to operate a locking means which locks the plurality of telescopically connected tubes in a retracted state for storage. This avoids the need for a user to operate two separate controls. More preferably, the release member also secures the wand at a desired operating length. Thus, with only one control a user can release the wand from the main body and bring the wand to a state ready for use.

Preferably a hose for carrying fluid flow between the wand and the main body can be retained around the periphery of the machine. This allows all the components of the appliance: the main body, wand and hose, to be stored together in one tidy package.

Although the invention is described in detail with reference to a vacuum cleaner, it will be appreciated that it can also be applied to other forms of cleaning appliance. The term "cleaning appliance" is intended to have a broad meaning, and includes a wide range of machines having a main body and a wand for carrying fluid to or from a floor surface. It includes, inter alia, machines which only apply suction to the surface, such as vacuum cleaners (dry, wet and wet/dry variants), so as to draw material from the surface, as well as machines which apply material to the surface, such as polishing/waxing machines, pressure washing machines and shampooing machines.

Embodiments of the invention will now be described with reference to the drawings, in which:

Figure 1 shows a conventional vacuum cleaner of the cylinder type;

Figure 2 shows a vacuum cleaner in accordance with an embodiment of the invention with the flexible hose fitted to the chassis of the cleaner;

5

Figures 3A and 3B respectively show a side view and a rear view of the vacuum cleaner of Figure 2 with the hose removed;

10

Figure 4 shows the wand of the vacuum cleaner of Figures 2, 3A and 3B in an extended state;

Figure 5 shows the wand of Figure 4 in a retracted state for storage;

15

Figure 6 is a cross-section through the wand while stored on the vacuum cleaner of Figure 2;

Figure 7 is a detailed view of the catch on the wand;

20

Figure 8 is a schematic plan view of the vacuum cleaner showing the storage of the hose;

Figures 9 and 10 are cross-sections of the hose storage channel;

25

Figures 11A and 11B show the hose location collar on the flexible hose;

Figures 12 and 13 show the securing mechanisms on the wand;

Figures 14 to 16 show alternative forms of the wand;

30

Figure 17 shows an alternative form of the main body of the vacuum cleaner;

Figures 18 to 23 show alternative forms of hose retaining schemes for the vacuum cleaner.

5

Figure 2 shows a cleaning appliance in the form of a vacuum cleaner. The vacuum cleaner has a main body 100 which supports the main components of the vacuum cleaner. In a traditional manner, the main body 100 has a chassis 110 which supports separating and collecting apparatus 120 and a motor-driven fan (not shown) for generating a suction which can draw dirt laden air into the separating apparatus 120. The main body 100 also has two main wheels 112, one on each side of the rear portion of the chassis 110, and a castor wheel 113 beneath the front portion of the chassis 110 which allow the main body 100 to be dragged along a surface. It will be understood that the wheels 112, 113 could be supplemented, or replaced, by other means for allowing the main body 100 to be dragged across a surface, such as skids. The form of the separating apparatus 120 is not important to the invention. While we prefer to use cyclonic separators which spin dirt, dust and debris from the airflow, other forms of separator can be used and examples of suitable separator technology include a centrifugal separator, a filter bag, a porous container, an electrostatic separator or a liquid-based separator.

In Figure 2, the separating apparatus comprises two generally cylindrical chambers 121, 122 which lie alongside one another. The chambers 121, 122 are connected to one another by a central spine 123. The separating apparatus 120 is removably mounted on the chassis for emptying and for access to components beneath the separating apparatus.

A flexible hose 150 and a wand assembly 160 connect to an inlet port 151 on the main body 100. The main body 100 of the cleaner is pulled along by the hose 150 as a user moves around a room. The hose 150 has a construction which is robust enough to



withstand this pulling action, and any normal abrasion which may be encountered as the hose rubs against obstacles in a room.

5 In this embodiment, the air inlet port 151 is centrally mounted on the main body 100 at the forward, lower part of the machine. In alternative embodiments of the machine where the air inlet is not centrally positioned, such as the machine shown in Figure 1 where the inlet is near the upper part of the separating apparatus 11, it is preferable to anchor the hose 150 to the machine at a central position (as with anchor point 25 in the machine shown in Figure 1) so that when a user pulls the hose 150, the main body 100  
10 follows the user.

Ducting on the chassis 110 connects the air inlet port 151 to an inlet to the separating apparatus 120. For a cyclonic separating apparatus 120, the inlet to the separating apparatus is arranged to guide incoming airflow through the wall of the chamber of the  
15 cyclonic separator in a tangential manner.

The second end of the hose 150 connects to the wand 160. A suitable wand assembly 160 is described in our co-pending International Patent Application PCT/GB02/00850. As shown in Figure 4, the wand comprises a set of three tubes 161, 162, 163 of  
20 progressively decreasing diameter. The tubes 161, 162, 163 can telescope inside one another and are retractably housed inside a storage tube 165. The three tubes 161, 162, 163 are slideable inside one another and can be moved between a stored position (as best shown in Figure 6) and an extended position (as shown in Figure 4) in which one tube is extended from another such that only the ends of the tubes overlap one another.  
25 Securing mechanisms 400 secure the tubes in an extended position, as will be described more fully below. Tubes 161, 162, 163 are progressively longer in length. The length of each tube is chosen so that it fully occupies the available space within the storage tube 165 when the securing mechanisms 400 are lying alongside one another.

The distal end of tube 163 has a connector 280 which is adapted to receive a floor tool, such as the floor tool shown 20 in Figure 1, in any known manner. For example, the floor tool can be connected to the tube 163 by means of an interference fit, interconnecting bayonet fittings, snap-fit connections, a screw threaded collar and sleeve, or by any other suitable means. Accessory tools may also be fitted to the tube 163 in place of the floor tool. A handle 200 is connected to storage tube 165 to allow a user to manipulate the wand 160. Flexible hose 150 extends from one end of the storage tube 165 and is connected to the storage tube 165 by an outlet connector 168 which is rotatable about axis X-X', as shown in Figure 5. This part of the wand is described more fully in our International Patent Application WO 01/50940.

For ease of storage, and ease of carrying, the wand assembly 160 can be fitted to the main body 100 of the vacuum cleaner, as shown in Figures 2 and 3.

As best seen in Figure 3A, the length of the storage tube 165 is substantially equal to the length of the part of the main body 100 against which the wand is stored. In this manner, the wand 160 does not protrude too far beyond the main body 100 when it is fully retracted and stored on the main body 100.

As best seen in Figure 6, the wand 160 is stored alongside the uppermost surface of the main body 100. Figure 6 shows a cross-section through the wand 160 and the upper part of the separating apparatus 120 taken along the longitudinal axis of the vacuum cleaner. In this embodiment the upper surface of the separating apparatus 120, which itself is releasable from the remainder of the chassis 110 for emptying, is the part of the main body against which the wand 160 is secured. Fittings on the storage tube 165 of the wand assembly cooperate with complementary fittings on the upper surface of the separating apparatus 120 to retain the storage tube 165. The lower end of the storage tube 165 has a hooked projection 220 which extends outwardly from the tube 165. The hook 220 can locate beneath a hook 130 on the separating apparatus 120. This pair of hooks 220, 130 provides some mechanical support for the wand 160 during carrying,

and also helps to properly locate the wand 160. The majority of the mechanical support is provided by a locking catch at the other end of the storage tube 165. The locking catch comprises a movable catch ring 222 with a catch face 225 and is shown in more detail in Figure 7. The catch face 225 locates beneath another hook 135 on the upper face of the separating apparatus 120. The locking catch mechanism comprises a catch ring 222 which is pivotably mounted about the outside of the storage tube 165 about pivot point 223. The lower part of the catch ring 222 carries a catch face 225 for engaging with the main body. The catch ring is biased, by spring 241, into the locked position shown in Figures 5 and 6. An actuator member 235 is pivotably mounted to the storage tube 165 about pivot point 236. The actuator member 235 has a part which serves as a button 230 which can be operated by a user. The actuator member is biased by a spring 242 into the position in which it lies alongside the tube, as shown in Figures 2, 3A, 5 and 6. Actuator member 235 has an arm 237 on each of its sides, the end of the arm 237 locating within a notch 238 on the catch ring 222. In use, movement of the actuator member 235, by a user pressing button 230 in clockwise direction 239, causes arm 237 to urge catch ring 222 in an anti-clockwise direction about pivot point 223 to release catch 225. Actuator member 235 also has two further locking functions which are simultaneously achieved when button 230 is pressed. Firstly, the furthest end of the actuator member has a hook 231 which can engage with the connector 280 on the end of the tube 163. When all of the tubes 161, 162, 163 have been retracted into the storage tube 165, connector 280 lies alongside the end of storage tube 165 and hook 231 can hook onto connector 280. All of the tubes 161, 162, 163 are held securely within storage tube 165 until the actuator member 235 is operated to release the hook 231. The leading edge of hook 231 has an inclined face which can be displaced by the leading edge of connector 280 as the tubes are retracted inside the storage tube 165. This allows the hook 231 to automatically ride onto, and thus retain, the cap 280 as the tubes are moved towards a stored position. Connector 280 has a cap which, in the stored position (best shown in Figure 6) accommodates all of the securing mechanisms 400 of the tubes and thus serves to protect them from damage during storage.

Another feature of the locking mechanism is that projection 232 on the actuator member 235 can seat itself in a depression in the wall of tube 161 to lock the position of tube 161. Operating the actuator member 235 raises the projection 232 from its seated position and thus allows tube 161 to be moved. Tube 161 has a series of similar  
5 depressions 233 along its length. Projection 232 also serves to secure the tube 161 in a desired extended position with respect to the storage tube 165.

It will be appreciated that operation of the single button 230 simultaneously releases the wand 160 from the main body 100 of the vacuum cleaner, releases the end connector  
10 280 which in turn allows the tubes 161, 162, 163 to be withdrawn from the storage tube 165, and locks tube 161 in a selected extended position.

The method of operating the vacuum cleaner will now be described. To store the wand a user brings the storage tube 165 of the wand assembly, in its fully retracted state,  
15 alongside the uppermost face of the main body 100 and engages the hooked projection 220 behind hook 130 on the main body. The user then pivots the storage tube 165 towards the main body so that the catch face 225 engages with the hook 135 on the main body. The inclined shape of the catch face 225 causes the catch ring to move away from the hook 135, against the bias of the spring, as the storage tube is pushed against the  
20 main body, and to reseal itself beneath the hook 135. At this point the wand 160 is now fully locked in position on the main body 100 and a user can then use the handle 200 on the storage tube 165 of the wand assembly to carry the vacuum cleaner.

A floor tool can be left in place on the end of the wand 160 or it can be removed and  
25 stored elsewhere on the main body 100.

To release the wand 160 from the storage position, a user operates the button 230 to move catch ring 222 and catch face 225. This releases the catch face 225 from the hook 135. The user can then pull the wand 160 away from the main body and slide the wand  
30 upwards, to remove the hooked projection 220 from the main body 100.

The position in which a user will naturally feel comfortable grasping the handle 200 to lift and carry the vacuum cleaner is different to the position in which a user will wish to grasp the handle 200 to operate the wand for cleaning. In this embodiment, the handle 200 extends for some distance along the length of, and parallel to, the longitudinal axis of the storage tube 165 so as to provide the user with comfortable, longitudinally offset, positions for both carrying the vacuum cleaner and operating the wand for cleaning. Portion 205 of the handle, adjacent the end of the storage tube 165, is intended to be used to manipulate the wand during normal cleaning. Portion 205 lies at an angle to the longitudinal axis of the storage tube. This angled position, together with the position adjacent the end of the storage tube, has been found to be a comfortable position for manipulating the wand. Portion 208 of the handle is intended to be used to carry the cleaner. Control buttons for operating the vacuum cleaner can be provided in region 207. These controls can include an on/off switch, a suction power control etc. as is well known in the art. A bleed valve 209 is also located near to the part of the handle 205 which is used during cleaning. The bleed valve admits air when the trigger 209 is pulled, so as to reduce the suction force at the remote end of the wand.

The hooked projection 220 on the storage tube 165 and hook 130 on the main body both extend for some distance perpendicularly to the longitudinal axis  $Y - Y'$  of the storage tube 165. This helps to minimise any rotational movement, or wobble, of the wand about its longitudinal axis. While the hooked projection 220 and catch ring 222 adequately secure the wand to the main body 100, it is preferred to add some further features to the wand 160 and the main body for additional security. Ribs 250 extend radially outwardly from each side of the storage tube 165. Ribs 251 also extend outwardly from the upper face of the separating apparatus 120 at positions adjacent to where the storage tube 165 will lie when it is secured to the main body. The ribs serve to minimise any rotation of the storage tube 165 about its longitudinal axis  $Y-Y'$  when the tube is secured to the main body. In short, they minimise 'wobble'. A second rib 255 projects outwardly from the storage tube 165, perpendicularly to the longitudinal

axis Y-Y' of the storage tube 165. This locates against a similar rib 125 on the main body 100 and serves to minimise movement of the storage tube 165 in the direction of the longitudinal axis of the tube 165.

5 In this embodiment, the separating apparatus 120 comprises two cylindrical chambers which lie alongside one another on the main body 100. The hooks 130, 135 are formed on the inlet duct structure which lies between the chambers. This allows the wand 160 to fit more snugly against the main body and helps to reduce the amount by which the wand 160 protrudes beyond the envelope of the main body.

10

The hose 150 can be stored around the main body 100 of the vacuum cleaner. The hose 150 has a length which is sufficient such that, in use, the main body 100 can sit on a floor surface and the user can manipulate the wand at a convenient height, without any excessive drag. In our embodiment the hose has a length of around 1.5m and a length in  
15 the range 1.3 – 1.8m is typical. Conveniently, the hose 150 also has a length which is sufficient to lie once around the perimeter of the main body 100. The hose inlet 151 to the main body 100, as well as being centrally located for ease of pulling, lies below the position where the hose end 168 of the wand 160 will lie when the wand 160 is stored on the main body 100. This allows the hose 150 to form one complete perimeter of the  
20 main body 100. Hose retaining features 310 on the main body allow the hose 150 to remain attached to the main body 100 during carrying and during storage.

In the embodiment shown in Figures 2 and 3 a single continuous hose receiving channel 300 is provided along the sides and back of the periphery of the chassis 110. Figure 2  
25 shows the hose 150 in place in the channel 300 and Figures 3A and 3B show the hose removed from the channel 300.

Along most of its length, channel 300 has a semi-circular shape and a diameter which is just greater than the hose 150 that it retains, as shown in Figure 9. This part of the  
30 channel 300 defines the storage path for the hose 150 and serves to guide and support

the hose 150 when it is stored. At each end the channel 300 there is a hose retaining part 310 which is capable of grasping the hose 150. The hose retaining parts 310 have a shape which is greater than a semi-circle, i.e. the channel extends around greater than half of the circumference of the hose 150. As shown in the cross-section of Figure 10, hose retaining parts 310 have two leading edges 311, 312. The channel, or at least the hose retaining parts 310 of the channel, are formed from a material, such as polypropylene, which is sufficiently resilient to allow the leading edges 311, 312 to be prised apart to form an opening with a width which is at least equal to the diameter of the hose 150. The material should also be capable of withstanding repeated flexing of this kind over the lifetime of the machine. The entire channel 300, the hose retaining parts 310, or even just the leading edges 311, 312 of the channel can be formed from the resilient material, with the remainder of the channel being formed of a more rigid material. This shape of hose retaining parts 310 allows the hose, once it is fitted within the channel 300, to remain clasped by the leading edges of the channel. The hose can be removed from the channel 300 by applying a force to the hose which is sufficient to overcome the retaining force of the leading edges 311, 312 of hose retaining parts 310. Thus, the hose 150 can be removed in a one handed operation. In a more elaborate alternative scheme, the leading edges 311, 312 of the hose retaining parts 310 can be provided with finger grips by which a user can, with one hand, prise the leading edges apart while the user, with their other hand, pulls the hose 150 from the channel.

While a semi-circular shaped channel is preferred, as it provides continuous support around the hose, the channel could have any shape which provides support at a plurality of points around the hose, e.g. a square or other polygonal shaped structure. Alternatively, a set of ribs can project outwardly from the chassis 110 to define supports for the hose 150. The channel 300 can be integrally formed with the remainder of the main body or it can be formed as a separate part which can then be mounted on the main body during assembly of the machine. The channel 300 can be removably mounted to the chassis 110 so that, if a user does not want this feature they can simply remove the channel 300 from the chassis 110.

The hose 150 has a length which is greater than the perimeter of the main body 100. The main reason for this is to allow some slack around the inlet 151 to the main body and at the hose end 168 of the wand 160 since an excessively tight bend in these regions would cause damage to the hose. If the hose 150 were to be stored with a tight bend, it could suffer permanent deformation and kinking. Having a hose 150 which is longer than the perimeter of the chassis 110 can result in a user incorrectly fitting the hose 150 to the main body 110. In particular, a user could fit the hose 150 too tightly to the main body at end 151, which would result in an unacceptably tight bend in this region, leaving a large loop of hose at the other end 168 which could hang below the main body 110. In order to instruct a user where to correctly fit the hose 150, hose 150 is provided with a collar 350 which is wider than the diameter of channel 300. This collar 350 is shown in Figures 11A and 11B. The collar 350 serves as a guide for informing a user where to begin fitting the hose 150 into channel 300. As well as visually indicating the correct position for fitting the hose 150, it can be readily located (felt) by a user. Because collar 350 is wider than channel 300, that part of the hose on which collar 350 is fitted cannot be fitted inside the channel. Thus, the hose 150 simply cannot be fitted with an unacceptably tight bend in the region of inlet 151 or wand connector 168. Collar 350 comprises a first collar 351 which has a plurality of radially inwardly extending ribs for engaging with the spaces between ribs on the hose 150. The first collar 351 can be formed as two semi-circular parts which are fitted to the hose 150 by snapping them around the hose in the desired position. A second collar 352 fits around the first collar 351 and holds the two semi-circular halves of collar 351 in place. A small bump feature 353 on the outer surface of first collar 351 corresponds to a small depression on the inner face of second collar 352.

Channel 300 has a shape which causes the hose 150 to follow a sinuous path around the main body 100 of the machine. Expressed another way, the hose storage path is non-planar. From Figures 2, 3A, 3B and 8 it can be seen that the hose 150 begins at the front, lower part of the main body 100, curves around the front of the machine, over the



top of the first wheel 112, fitting within the envelope of the machine. After closely following the shape of the wheel, and closely fitting alongside the separating apparatus 120, the hose 150 passes, along a generally convex shaped path beneath a tool storage area on the rear of the machine. On the other side of the machine the hose follows the same path, before following a gently curving path to the wand connector 168. This layout not only allows the hose 150 to fit neatly within the overall envelope of the machine, but it increases the length of the path, compared to a coil which lies in a single plane, thus increasing the length of hose 150 which can be accommodated. It is noted that the ends of hose 150 are held in position by virtue of connection 151 to the main body and connection 168 to the wand.

The wand 160 itself will now be described in more detail.

Securing mechanisms 400 are capable of either locking the tubes 161, 162, 163 to one another, as is needed when the tubes are in an extended position, or allowing free movement of the tubes with respect to one another, as is needed when the tubes are being retracted. A securing mechanism 400 is provided at the distal end of tube 161 for securing tube 161 to tube 162 and a further securing mechanism 400 is provided at the distal end of tube 162 for securing tube 162 to tube 163. The securing mechanisms 400 automatically lock the tubes, as they are brought to their fully extended position, and automatically unlock as the tubes are retracted.

The detail of these securing mechanisms is not important to the invention. However, for completeness, one embodiment will now be described with reference to Figures 12 and 13. Tubes 162, 163 represent two adjacent stages of the wand 160.

The securing mechanism 400 comprises a ring 410 which fits around the outside of tube 162. The ring 410 comprises a plurality of arms 459 which are connected to, and extend axially rearwardly from, the ring. Between each arm 459 is an arc-shaped part which fits alongside the outer surface of the tube 162. Each of the arms 459 have a radially

inwardly extending projection 454 which locates within an aperture in the wall of the tube 162. The arms 459 are pivotable about the ring and the securing mechanism is manufactured from a material which is sufficiently resilient to permit it to flex outwardly and return to the position shown without breaking.

5

Tube 163 has an inclined surface 470 which serves to move the projections 454 radially outwards as the tubes are brought into an extended position, the projection seating itself in the aperture 420 in the wall of tube 162 and locking the tubes.

- 10 To release the tubes 162, 163, the arms 459 flex radially outwardly, pivoting about the ring. This carries the arm 459 sufficiently radially outwardly such that the projection 454 lies radially outside the aperture 420 in the tube. The forward inclined surface 452 of one securing mechanism 400 presses against the rearward surface 456 of another securing mechanism 400 to cause the arm to move in this radial fashion.

15

A seal 460 is provided on each tube for sealing against another tube. The seal 260 is located at one end of tube 30 and is secured to the inner surface of the tube. The seal 260 can be bonded or clipped in place.

- 20 It is preferable for the wand to be lockable with a range of different overall lengths such that users who differ in their physical dimensions (height, arm length) can comfortably use the wand. To satisfy this requirement, the uppermost tube 161 is provided with a set of locking positions, as shown in Figure 6. Conveniently, these locking positions are provided as notches 233 in a ridge which runs along the length of tube 161.

25

The tubes can be manufactured from a metal such as steel or aluminium, or even a robust plastic material. The tubes are preferably formed from a material of constant thickness, the ridges and channels being formed by shaping the tube. This has the advantage of minimising the weight of the finished product.

30

In the above embodiment, the securing mechanisms are manufactured from a resiliently flexible material such as a nylon compound. However, an equivalent pivotal movement of the arms can be achieved by manufacturing each arm as a separate part and providing a pivot between each arm and the remainder of the securing mechanism. The resilience  
5 of the arm can be achieved by mounting a spring between the arm and the tube or between the arm and a fixed part of the securing mechanism.

While the above described embodiments show the securing mechanisms 400 as being a separate part from the tubes, a securing mechanism could be manufactured integrally  
10 with a tube. A plastic securing mechanism could be moulded (or otherwise formed) around a metal tube, or a plastic securing mechanism could be moulded (or otherwise formed) with a plastic tube.

The operation of the wand will now be described. To extend the wand 160, a user holds  
15 storage tube 165 by handle 200 and pulls the narrowest tube 163 axially away from the storage tube 165. Each of the tubes 161, 162, 163 slides outwardly from the storage tube 165. As each tube reaches an extended position with respect to another tube, for example, as tube 163 slides towards the position with respect to tube 162 shown in Figure 12, the tubes automatically lock in this position.

20

The procedure for collapsing the wand 160 will now be described. A user firstly operates release button 230 on storage tube 165. This releases the catch 232 from tube 161. A user pushes the distal end of tube 163 axially towards the storage tube 165. This causes tube 161 to slide within storage tube 165. Once tube 161 has been fully retracted  
25 inside the storage tube 165 the securing mechanism 400 pushes against the leading edge of the storage tube 165 and causes the arms of the securing mechanism 400 to flex radially outwardly, thus unlocking tube 162 from tube 161. Tube 162 then retracts inside the storage tube 165. The complete wand retraction can be performed in one continuous, swift movement without the need for a user to separately operate each  
30 securing mechanism 400.

The wand which is shown here has three separate tubes or stages, in addition to a storage tube 165, but it will be appreciated that the wand could have only two stages or a higher number than three. Each additional stage would have the same type of securing mechanism 400.

### Alternatives

#### **Handles**

In the previously described embodiment, a single handle 200 is provided which serves for both normal cleaning and carrying. In an alternative embodiment, as shown in Figure 14, a first handle 600 is provided for use during cleaning and a second, separate, handle 605 is provided for carrying the vacuum cleaner.

Another alternative is shown in Figure 15 where a single handle is movable between a first position, for use in carrying the machine, and a second position for use during normal cleaning operations. The handle is pivotable between the two positions and is positively retained in each of the positions. This retention of the handle can be by a locking mechanism which is automatically operated as the handle is moved into the new position, and which is manually released, such as by a user operating a trigger, to release the handle from that position.

In another alternative shown in Figure 16 there is no handle as such for manipulating the wand. Instead, an angled conduit 610 is rigidly (non-rotatably) fixed to the end of tube 165 and this angled conduit 610 serves as a part by which the user can manipulate the wand. The angled conduit 610 can be shaped to provide a comfortable gripping surface, or it can be overlaid by a material which makes the conduit more comfortable to hold. In a still further embodiment, not illustrated, the carrying handle can be omitted altogether. In this case, the main body can be provided with an alternative carrying handle.

### Wand storage

In the main embodiment the wand 160 is secured to the main body 100 such that a fairly large proportion of the storage tube 165 of the wand sits above the remainder of the main body 100. It is possible to increase the size of the retaining channel 660 for receiving the wand, as shown in Figure 17. In this alternative embodiment the receiving channel 660 has a sufficient depth 661 to fully receive the storage tube 165 of the wand, with only the carry handle 200 protruding above the upper surface of the main body 100.

### Hose storage channels

10 The main embodiment described above has a single continuous channel 300 with hose retaining features 310 at each end. There are a number of alternatives to this. As an alternative to providing a single continuous channel 300, there can be multiple, shorter length, channels around the main body. Each of these channels can be provided with a hose retaining function, or just the channels at each end of the set of channels can be provided with this function, the other channels simply serving to define the hose storage path around the main body and to provide a support surface against which the hose 15 can rest, similar to portion 305 of the channel 300.

In an alternative embodiment, the entire channel can have a hose retaining function. 20 Looking again at Figures 2 and 3, this would be achieved by extending the leading edges 311, 312 all the way along the channel. Thus, the channel would have generally the same cross-section all the way along its length.

The channel can be integrally formed with the remainder of the chassis, as shown in 25 Figure 18, or it can be formed as a separate part which can then be mounted on the chassis during assembly of the machine. The channel can be removably mounted to the chassis so that, if a user does not want this feature they can simply remove the channel from the chassis.

A preferable enhancement is for each end of the channel to have a flaired cuff. This permits easy insertion of the hose into the channel. Once a first part of the hose has been inserted into the cuff, a user only needs to push the hose inwardly into the channel to prise the leading edges of the channel apart.

5

The hose retaining function can be achieved with other types of mechanism. Figure 19 shows individual clips 680 fitted to the periphery of the chassis 110 of the main body. There can be a single clip 680 on each side of the main body, or a number of such clips positioned along the intended hose storage path around the periphery of the main body.

10

Another form of clip is shown in Figure 20. This is in the form of a clip which can be manually opened or closed. There is a generally semi-circular (or other) shaped support part 650 and a second part 652 which is hingedly connected to the first part 650 or directly to the chassis 110. Part 652 is operable between an open state, in which part 652 opens far enough to allow hose 150 to be inserted into, or removed from, the clip and a closed state, in which the hose 150 is held against part 650. An alternative form of clip would have a pair of arms, each being hinged to a side of support part 650. The arms can extend fully around the hose so as to meet in the middle or can extend only partially around the hose 150. Preferably each arm is sprung loaded (e.g. by a sprung hinge) such that it rests firmly in both the open and closed states. Alternatively, an additional latch can hold the pair of arms together once they are brought into the closed position.

15

20

25

30

Another form of retaining mechanism is shown in Figures 21 and 22. A plurality of storage rings are positioned around the periphery of the main body 100. The storage rings can be formed of a rigid material or they can be formed of a resilient material, such that ring 690 can be stretched open to receive the hose 150, and return to a position where it fits snugly around the hose 150. Conveniently, the rings 690 can be formed from a rubber compound. To retain the hose 150 on the main body 100, the hose 150 is fed through each of the rings 690 in turn. This is a less desirable solution to what has

previously been described as it requires the hose to be separated from the wand to allow the hose 150 to be fed through the set of rings. After feeding the hose through the rings the hose can be connected, once again, to the wand.

- 5 In each of these alternative schemes the clips or rings can be fitted to the main body in the same winding path around the body as the hose storage channel of the main embodiment so as to cause the hose 150 to be stored in a sinuous path around the body.

10 In a still further alternative scheme, shown in Figure 23, the hose 150 is not held in place by clips or a channel which grasps the hose 150. Rather, the hose 150 is held under tension by hooks 681, 682, 683 positioned around the chassis 110 of the main body 100. The hooks 681, 682, 683 are each positioned on the inside of each turn along the path around the body. They define the storage path around the body and they support the hose 150. Each ring has a curved support surface on which the hose 150 can  
15 lie. Hook 681 is positioned above the wheel 112, hook 682 is positioned on the rear of the chassis to define the path along the rear of the chassis, and hook 683 is positioned in the same way as hook 681, but on the other side of the chassis 110. It is noted that the ends of hose 150 are held in position by virtue of connection 151 to the main body and connection 168 to the wand.

20

In each of these embodiments the hose storage path is symmetrical about the longitudinal axis of the main body of the machine. This results from the symmetrical nature of the main body, the machine being symmetrical for good steerability. However, it will be readily understood that there is no need for the storage path on one  
25 side to be the same as that on the other side, and the hose storage path can be adapted to fit within available space on each side of the machine.

#### Hose location collar

In the main embodiment, a collar 350 is fitted around the hose 150 to instruct a user  
30 where to fit the hose 150 into the retaining channel. The collar 350 is larger than the

hose retaining channel 305 or retaining parts 310. It will be appreciated that shapes of collar, other than a cylindrical collar, could be provided, and additional tactile features such as ribs, or bumps, can be added to the outer surface of the collar 350 to aid a user. Figures 24 - 26 show a range of alternative schemes for instructing a user where to fit the hose 150 around the main body 100 of the cleaning appliance. In Figures 24 and 25 the hose storage channel and hose location fitting have a corresponding shape which serves to instruct a user where to fit the hose. In Figure 24 the mating shapes are provided by surface 361 at the end of the storage channel 360, and by surface 362 on collar 365 on the hose 150. In Figure 25 ring-shaped cavities 372 are formed at an intermediate position along the storage channel 370. Ring-shaped fittings 371 on hose collar 375 fit within the cavities 372 on storage channel 370.

In addition to mechanical fittings to the hose 150, there are a range of solutions for visually instructing a user where to fit the hose. These can include a pattern, such as arrows or stripes, or simply coloured markings on the hose. The visual markings can be incorporated into the hose itself or they can be applied after manufacture, such as by applying a label or transfer to the outside of the hose or by painting the hose. Figure 26 show visual markings 378, 379 on collar 350 and the end of storage channel 380.



Claims

1. A cleaning appliance of the cylinder type comprising a main body and a wand assembly through which, in use, fluid can be carried to/from the main body, the main  
5 body and wand comprising retaining means for retaining the wand on the main body in a position in which a substantial part of the wand lies alongside the main body.
2. A cleaning appliance according to claim 1 wherein the wand assembly comprises a plurality of telescopically connected tubes which can be operated between a retracted  
10 state and an extended state, and wherein a substantial part of the length of the wand, in the retracted state, lies alongside the main body.
3. A cleaning appliance according to claim 2 wherein substantially all of the wand, in the retracted state, lies alongside the main body.
- 15 4. A cleaning appliance according to any one of the preceding claims wherein the retaining means retains the wand on the upper face of the main body.
5. A cleaning appliance according to any one of the preceding claims wherein the  
20 retaining means retains the wand along the longitudinal axis of the main body.
6. A cleaning appliance according to any one of the preceding claims wherein the main body comprises a channel for receiving the wand and the retaining means are located in the channel.
- 25 7. A cleaning appliance according to claims wherein the main body comprises two generally cylindrical containers lying next to one another and wherein the channel comprises the space between the cylindrical containers.

8. A cleaning appliance according to claim 6 or 7 wherein the channel has a sufficient depth that the wand lies substantially flush with the surface of the main body when the wand is retained on the main body.

5 9. A cleaning appliance according to any one of the preceding claims wherein the wand assembly has a handle for allowing a user to lift the main body when the wand assembly is retained on the main body.

10. A cleaning appliance according to claim 9 wherein the handle is the same handle  
10 by which a user, during normal use, can manipulate the wand.

11. A cleaning appliance according to claim 10 wherein the handle extends in a direction which is substantially parallel to the longitudinal axis of the wand so as to provide longitudinally offset positions for lifting the main body and for manipulating the  
15 wand.

12. A cleaning appliance according to any one of the preceding claims further comprising rotation prevention means for preventing rotation of the wand when it is retained on the main body.

20

13. A cleaning appliance according to claim 12 wherein the rotation preventing means comprises a first part, mounted on the main body, and a second part mounted on the wand, each part having a face which extends radially from the longitudinal axis of the wand.

25

14. A cleaning appliance according to any one of the preceding claims wherein the wand assembly further comprises a release member for operating the retaining means.

15. A cleaning appliance according to claim 14 wherein the wand assembly  
30 comprises a plurality of telescopically connected tubes which can be operated between a

retracted state and an extended state and a locking means for locking the plurality of tubes in a retracted state.

16. A cleaning appliance according to claim 15 wherein the release member is operably connected to the locking means.

17. A cleaning appliance according to claim 16 wherein the locking means operates between the widest of the tubes and the narrowest of the tubes.

18. A cleaning appliance according to claim 17 wherein the narrowest of the tubes comprises a collar and the widest of the tubes comprises a locking mechanism for retaining the collar on the narrowest tube when the tubes are stored.

19. A cleaning appliance according to any one of claims 15 to 18 wherein adjustment means are provided for securing the tubes in a range of different extended positions.

20. A cleaning appliance according to claim 19 wherein the release member is operably connected to the adjustment means.

21. A cleaning appliance according to claim 19 or 20 wherein one of the tubes comprises a ridge which extends in an axial direction along the tube, the ridge having a plurality of indentations along its length, the adjustment means comprising a lug for seating in a selected one of the indentations.

22. A cleaning appliance according to any one of the preceding claims further comprising a hose for carrying fluid flow between the wand and the main body, a first connector for connecting a first end of the hose to the main body and a second connector for connecting the second end of the hose to the wand, and wherein the main body

comprises hose guiding means for guiding the hose along a hose storage path around the main body.

23. A cleaning appliance according to claim 22 wherein the hose guiding means are positioned on the periphery of the main body.

24. A cleaning appliance according to claim 23 wherein the hose guiding means are positioned on the periphery of the main body such that the hose follows a sinuous path around the main body.

25. A cleaning appliance according to claim 23 or 24 wherein the first connector is located on the main body at a position which is adjacent the position of the second connector when the wand is retained on the main body such that the hose can be stored by wrapping the hose once around the periphery of the main body.

26. A cleaning appliance according to any one of claims 22 to 25 wherein the hose guiding means are arranged to retain the hose.

27. A cleaning appliance according to claim 26 wherein the hose guiding means comprises a channel which can receive and clasp the hose.

28. A cleaning appliance according to claim 27 wherein the opening to the channel has a smaller width than the diameter of the hose.

29. A cleaning appliance according to any one of the preceding claims in the form of a vacuum cleaner.

30. A cleaning appliance substantially as described herein with reference to the accompanying drawings.

**ABSTRACT****A Cleaning Appliance**

5 A cleaning appliance of the cylinder type comprises a main body (100) which supports separating apparatus (120) and other components of the appliance. A wand assembly (160) through which, in use, fluid can be carried to/from the main body is retained on the upper face of the main body (100) in a position in which a substantial part of the wand, in a retracted state, lies alongside the main body (100). A handle (200) on the  
10 wand (160) can be used to carry the main body (100) when the wand (160) is retained on the main body (100). A single release button (230) on the wand (160) can release the wand (160) from the main body (100), unlock the tubes of the wand (160) and secure the wand at a desired operating length.

15 (Figure 2)

1/16



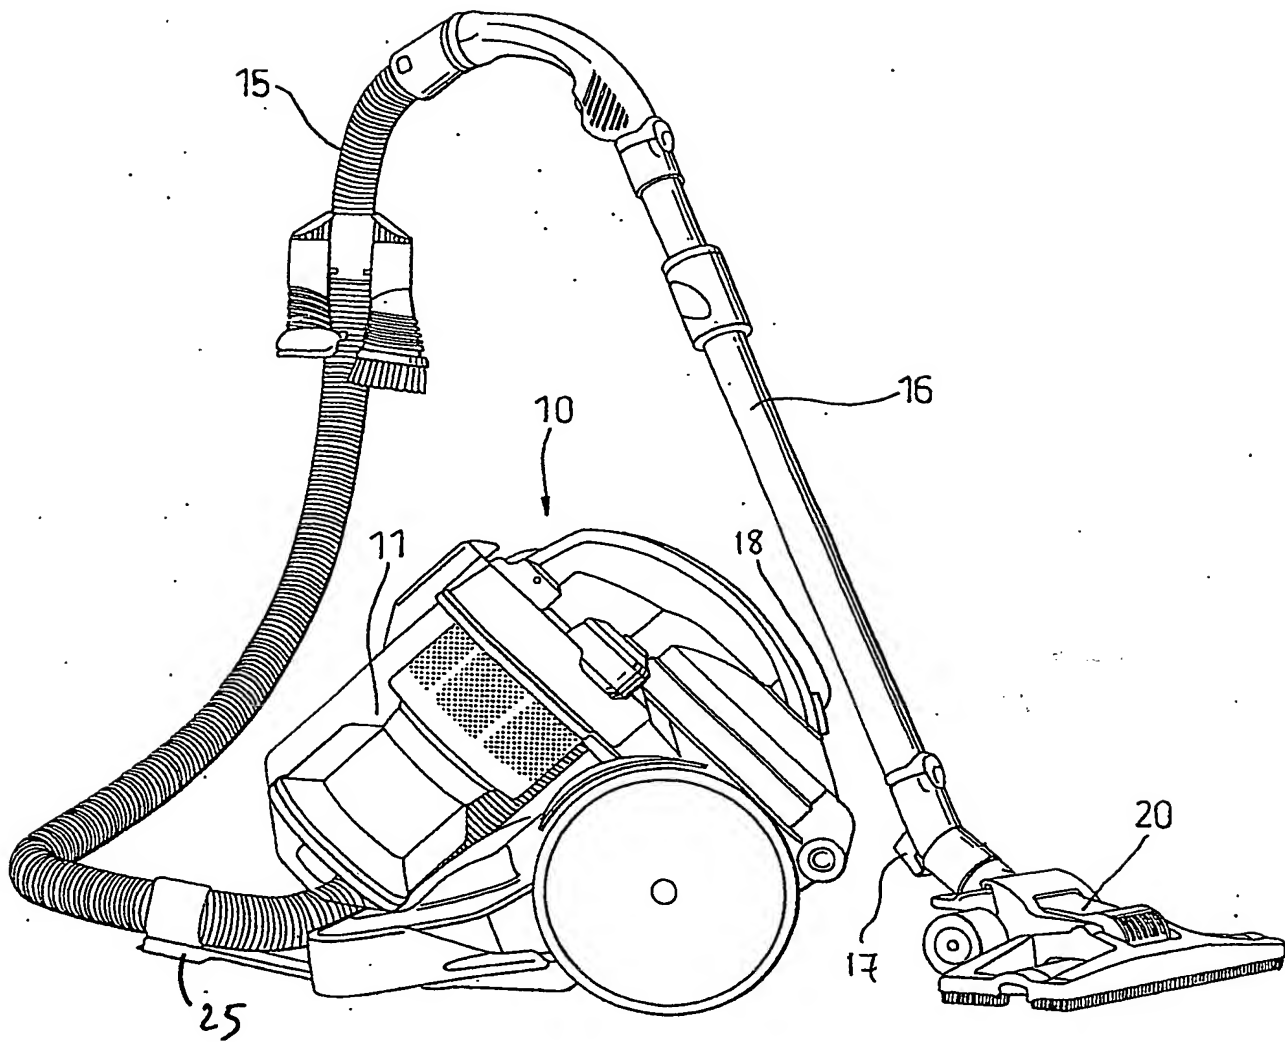


FIG. 1

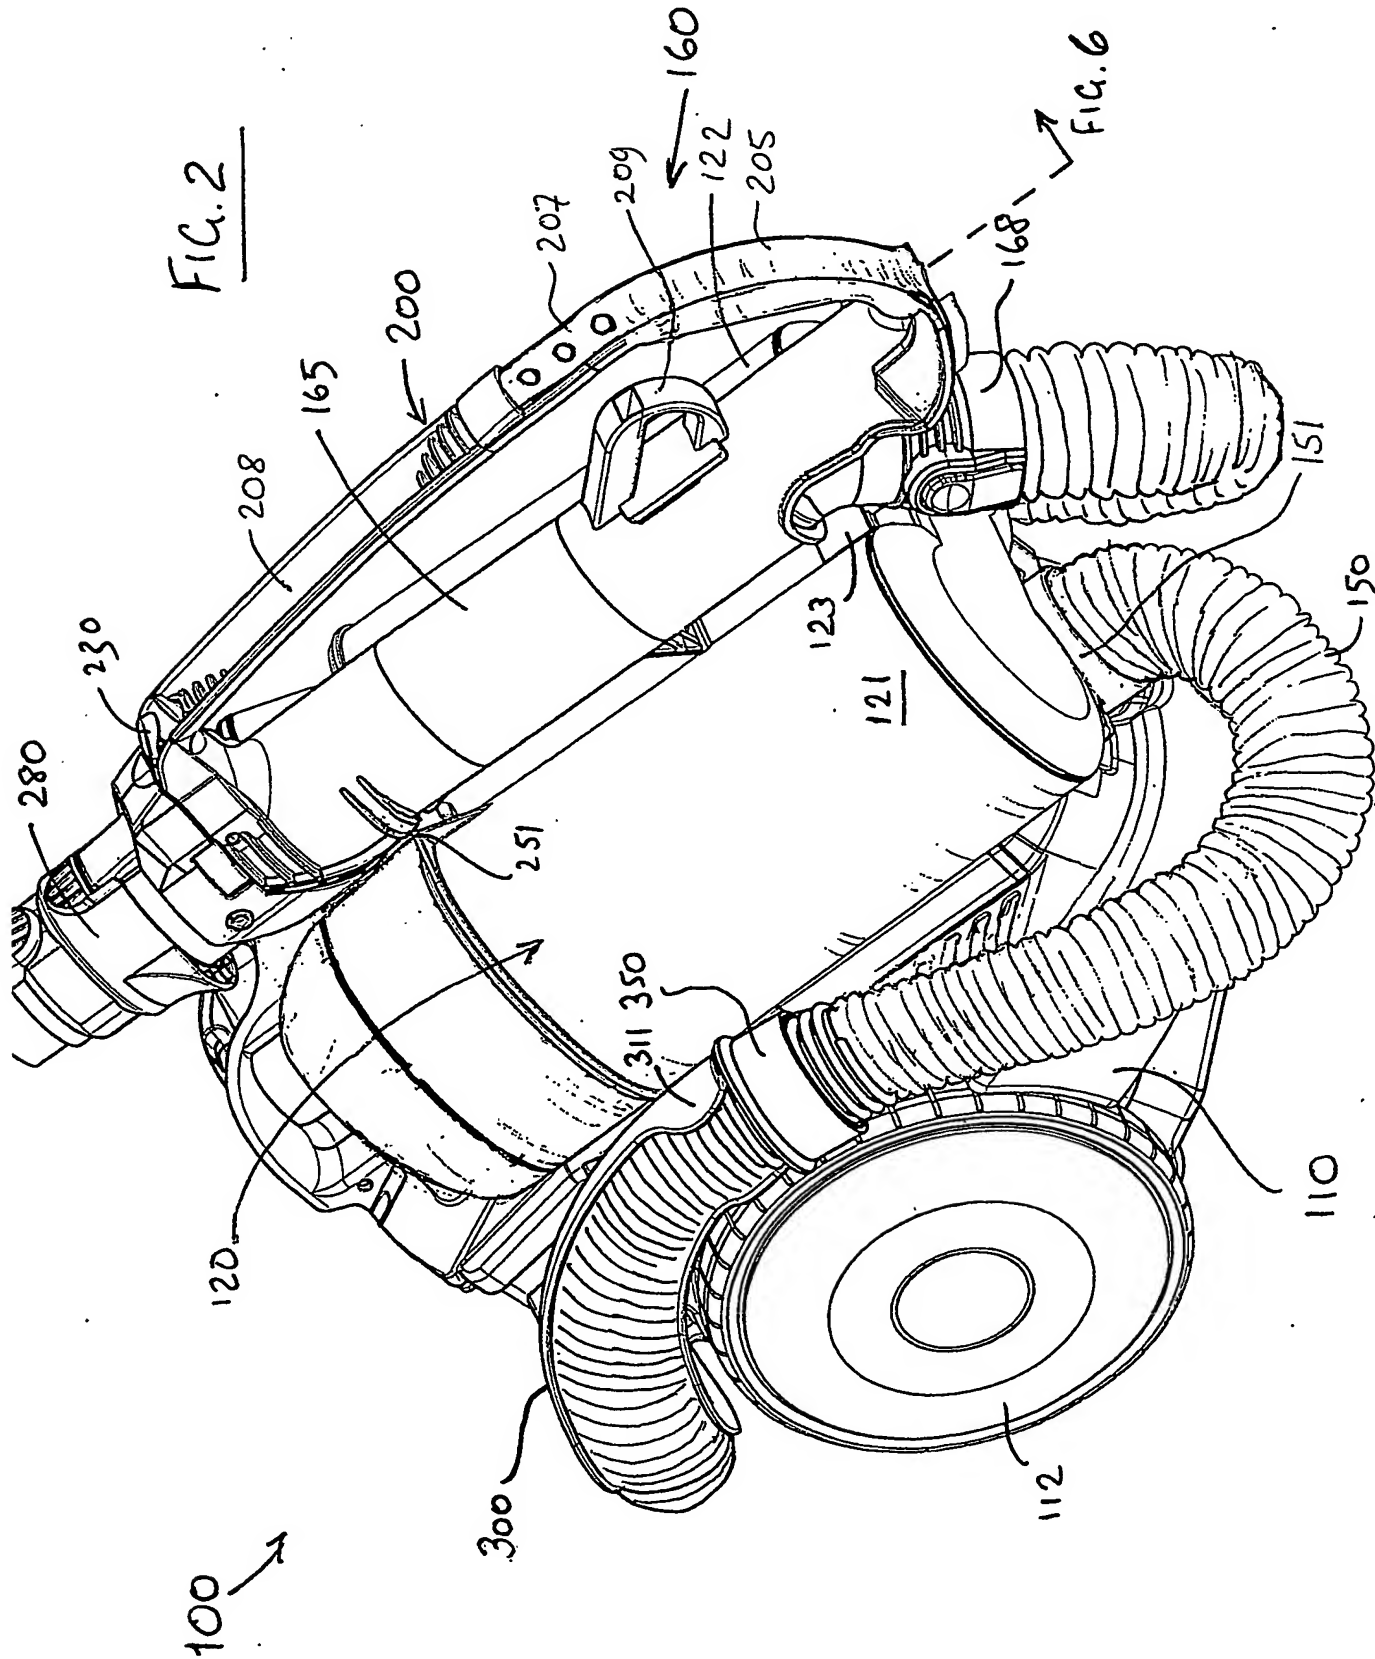

3/16

FIG. 3A

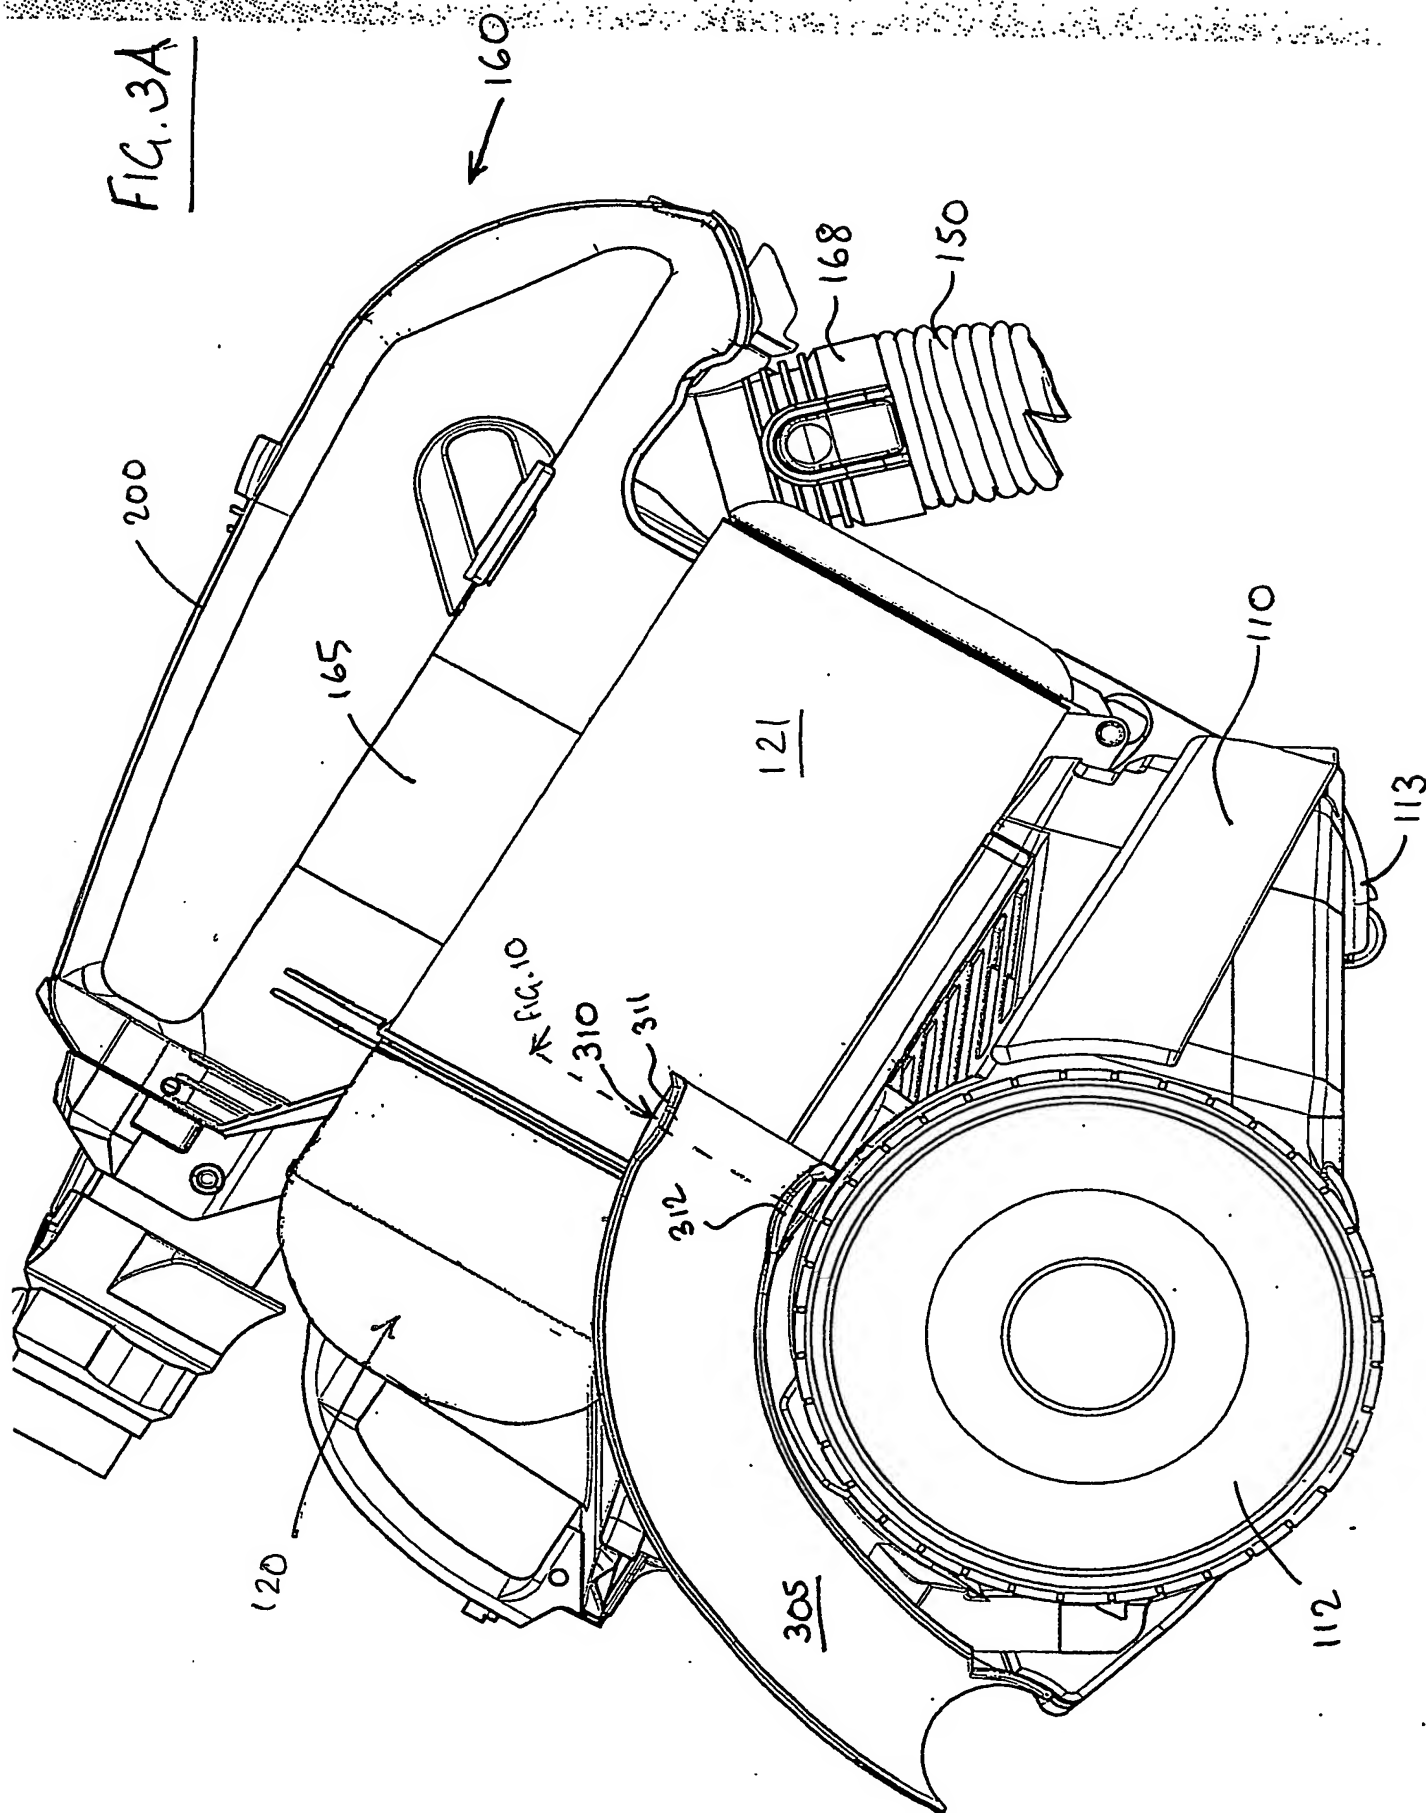



4/16

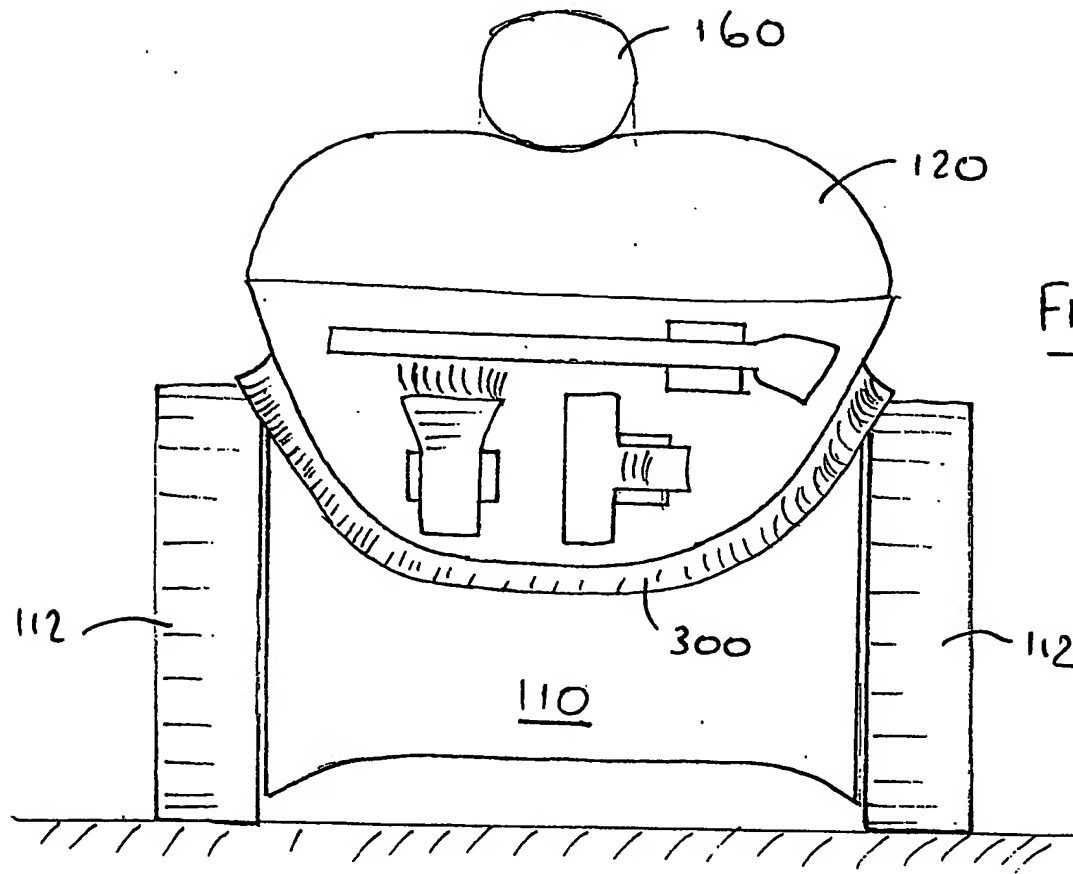


FIG. 3B

5/16

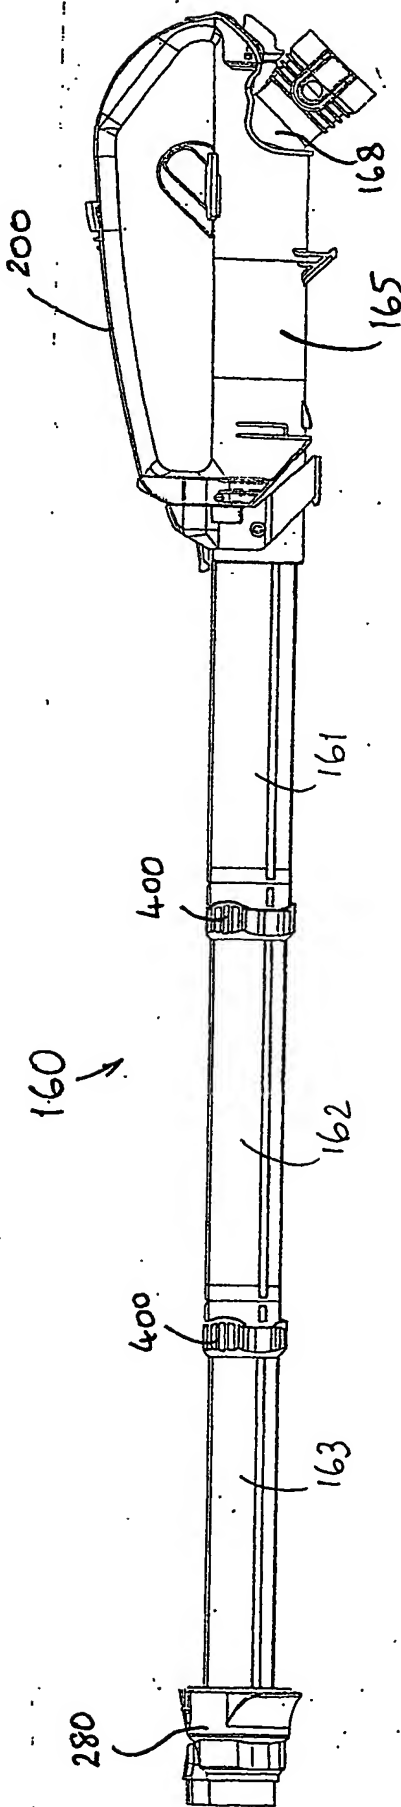


Fig. 4

6/16

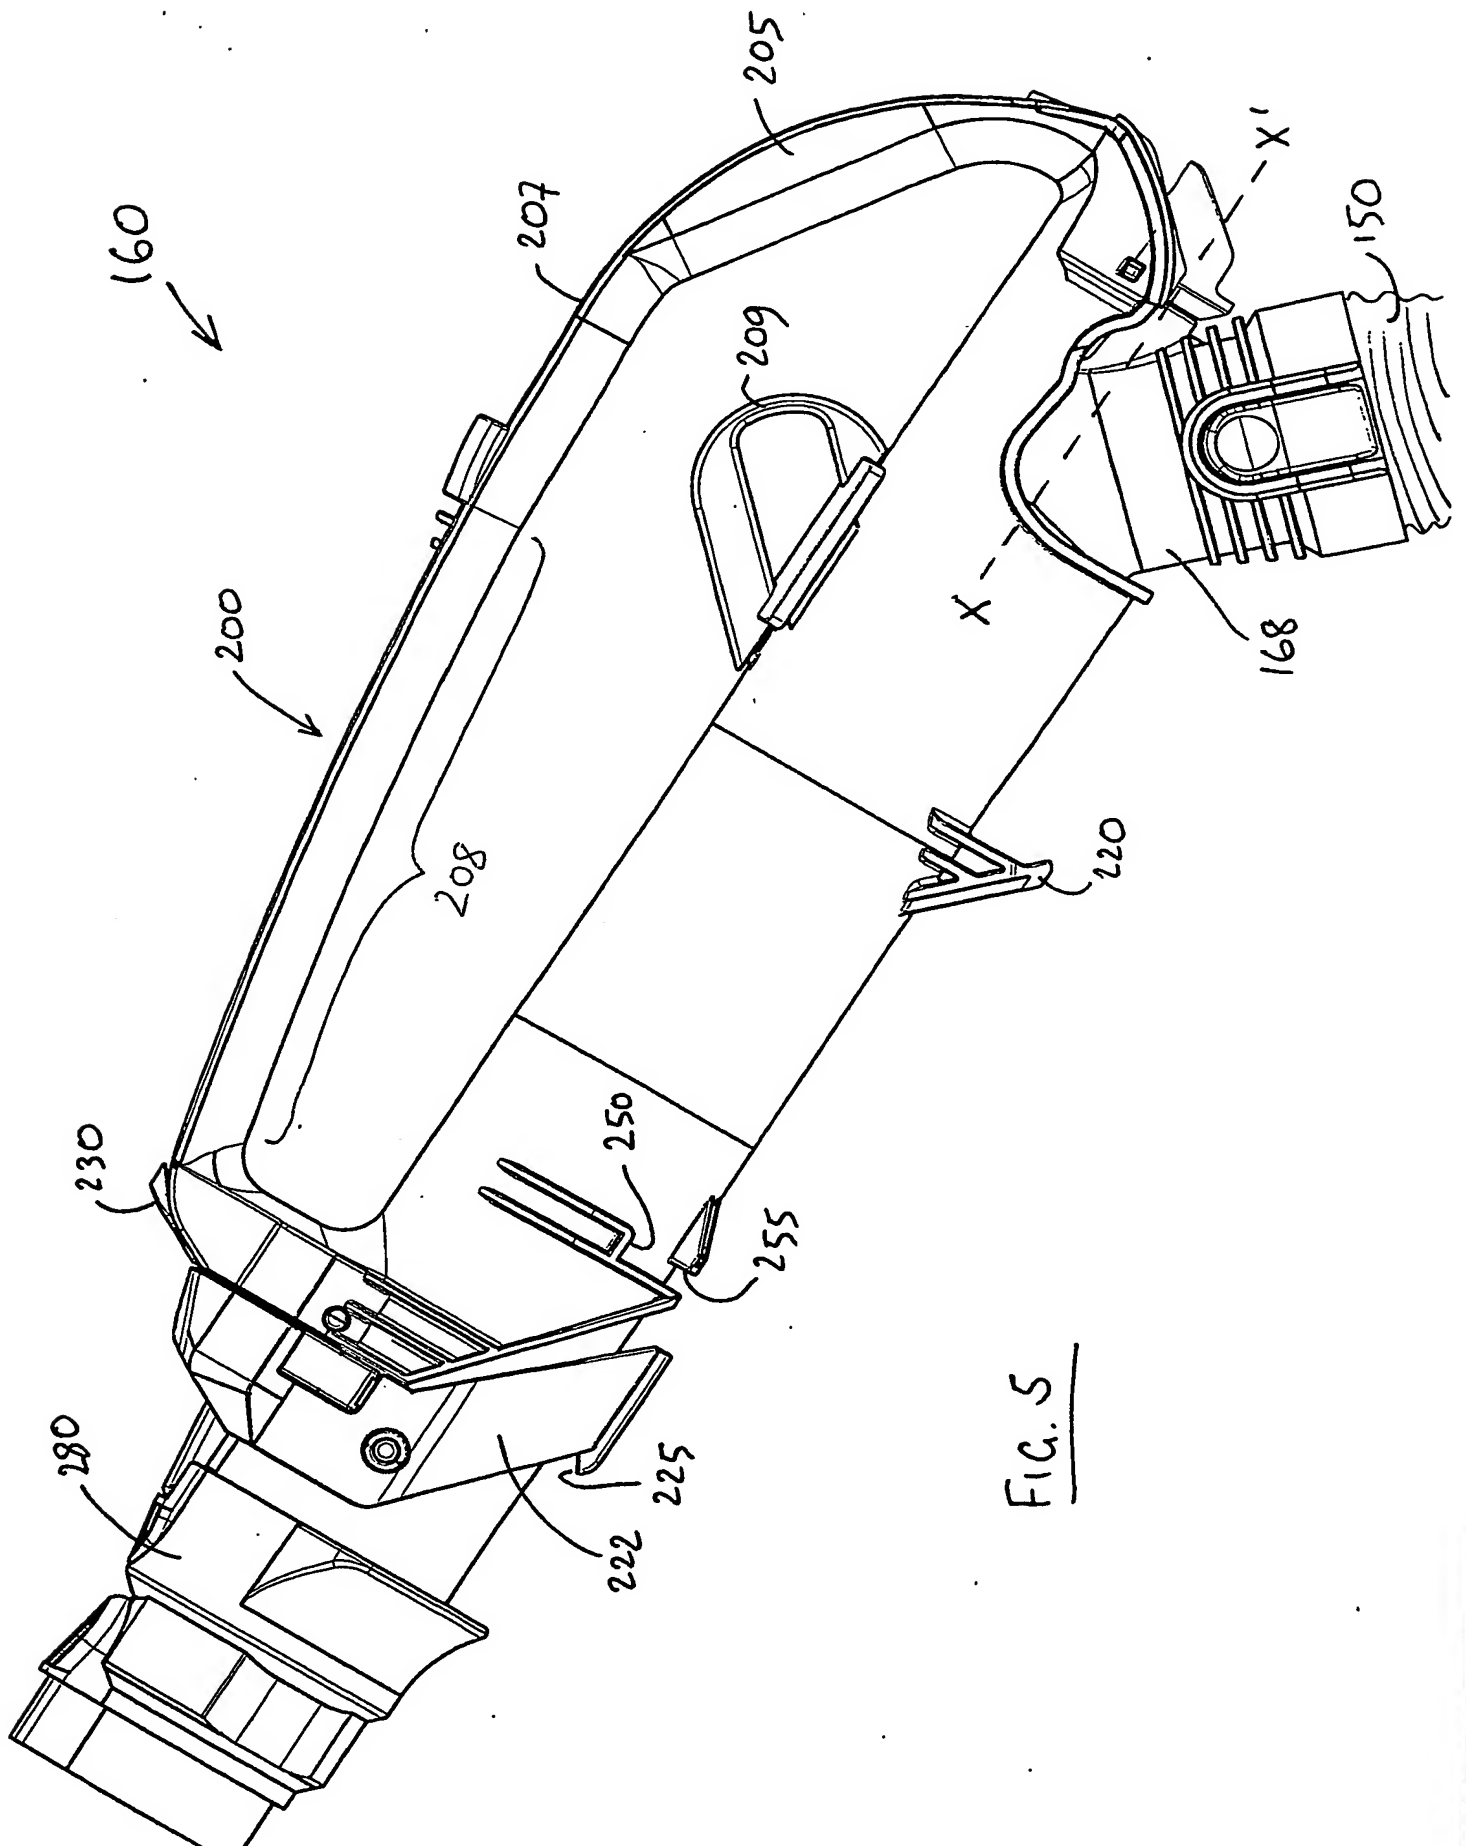


FIG. 5

Fig. 6

8/16

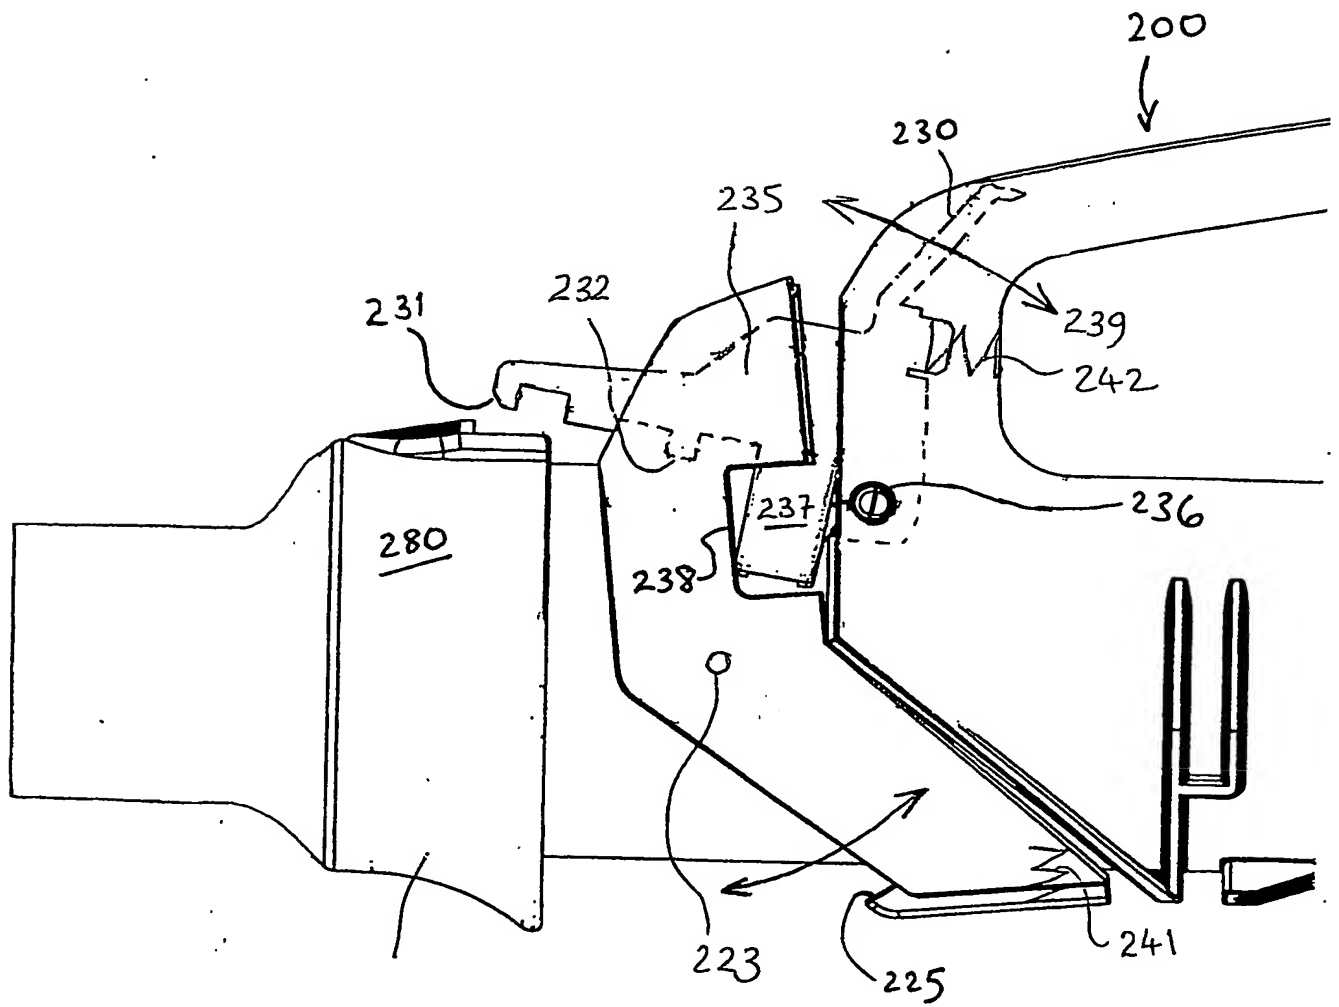


FIG. 7

9/16

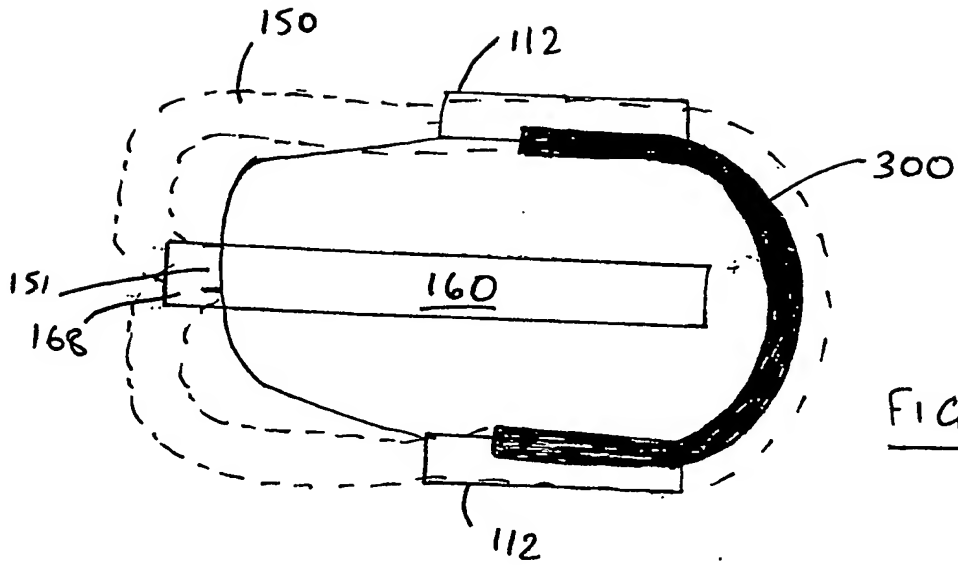


FIG. 8

10/16

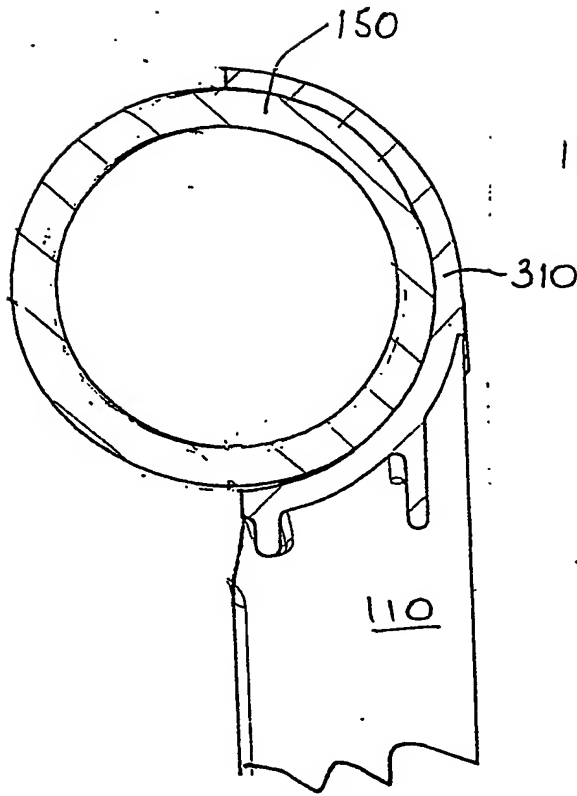


FIG. 9

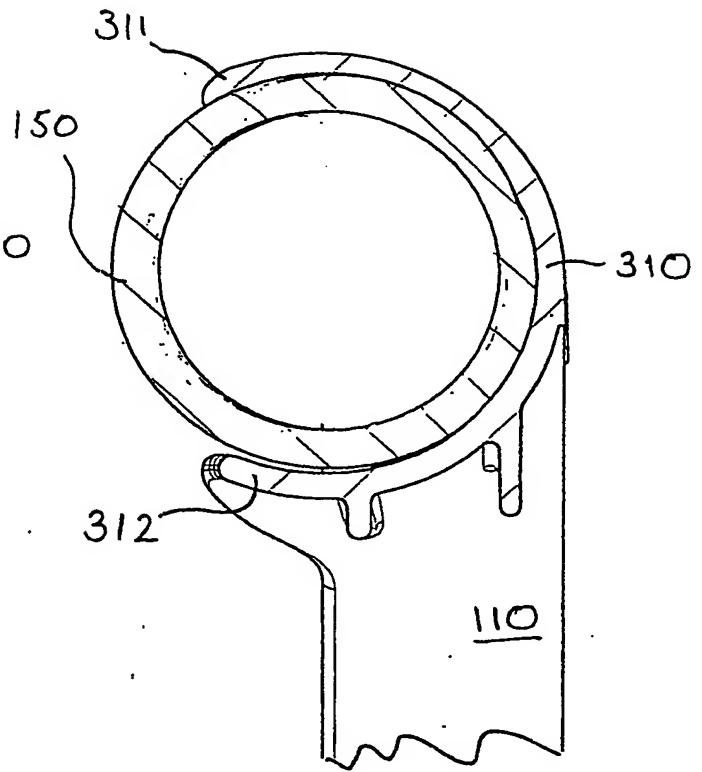


FIG. 10

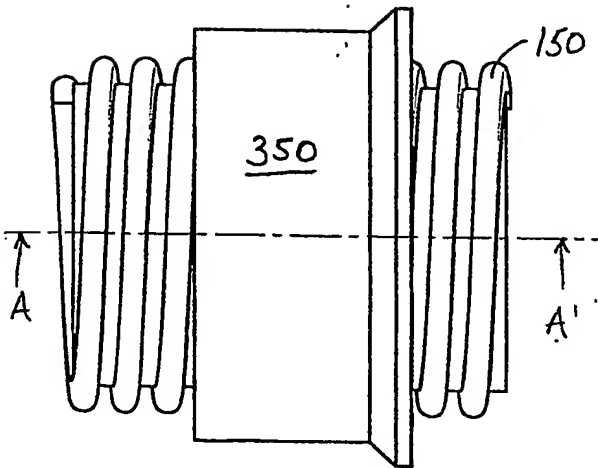


FIG. 11A

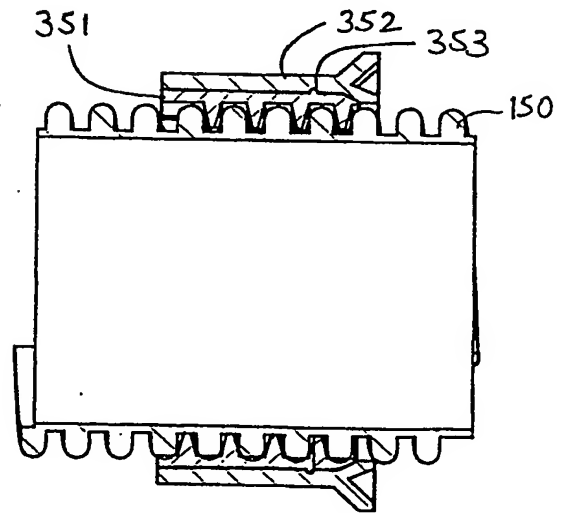


FIG. 11B

11/16

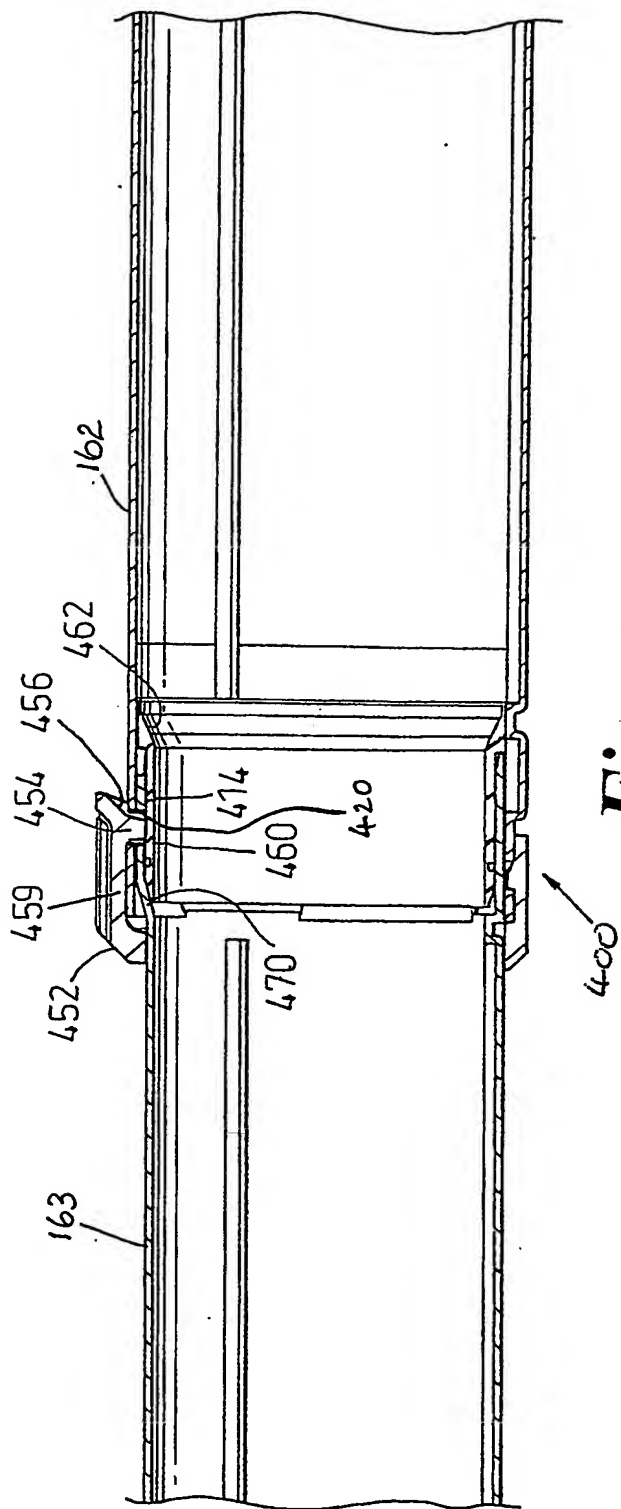


Fig. 12

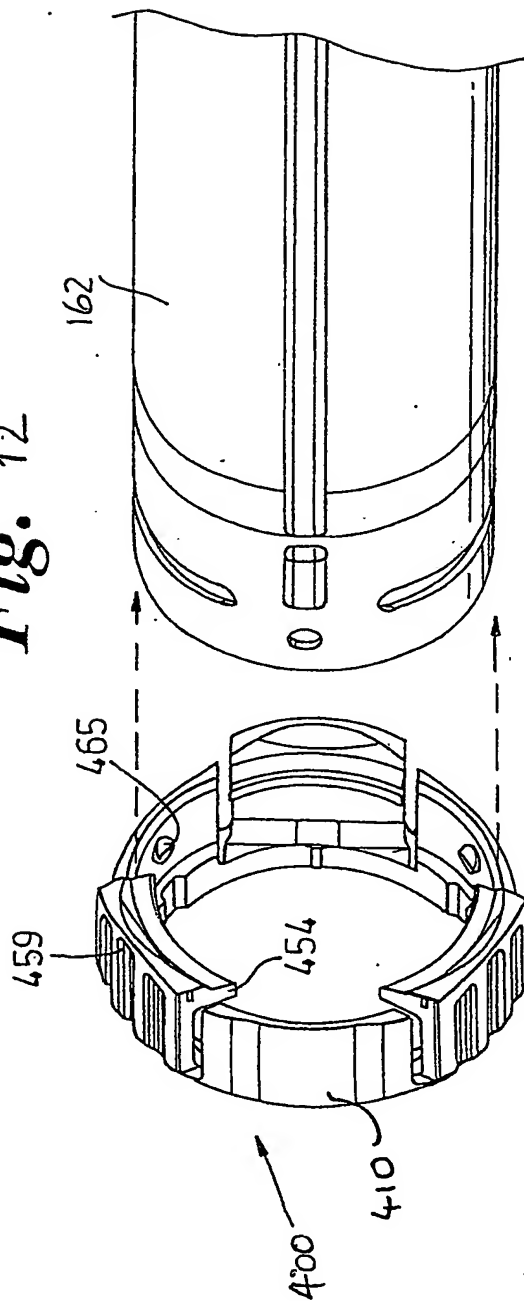


Fig. 13



12/16

FIG. 14

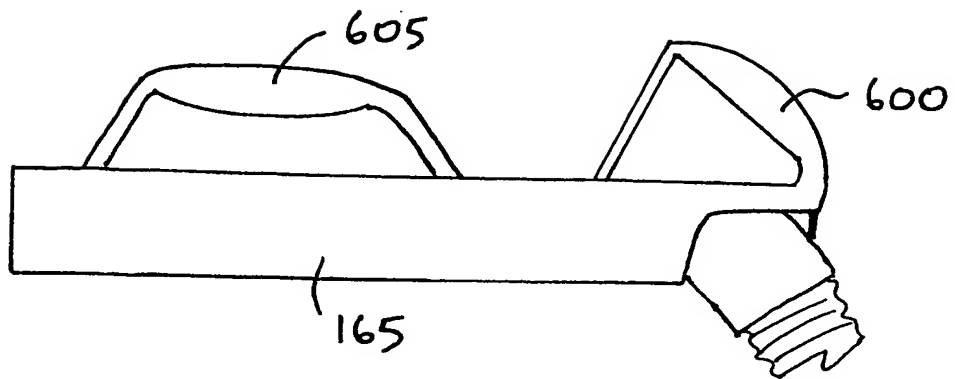


FIG. 16


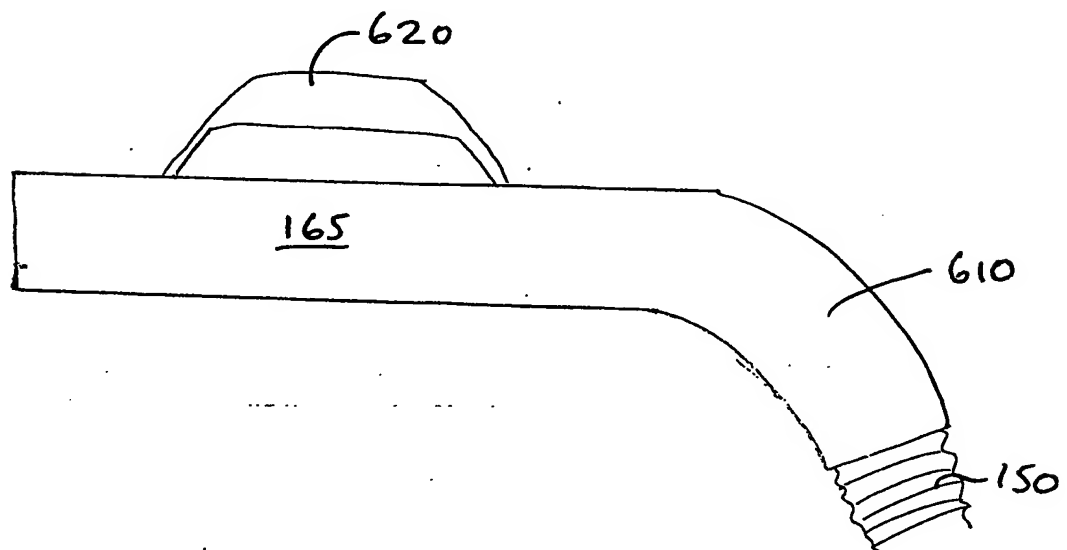


FIG. 15

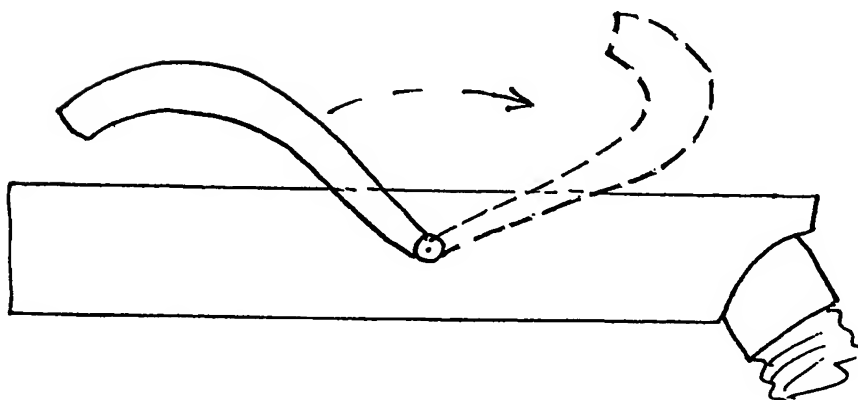

13/16

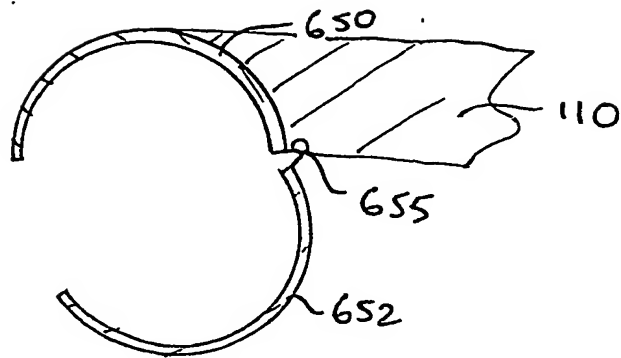


FIG. 20

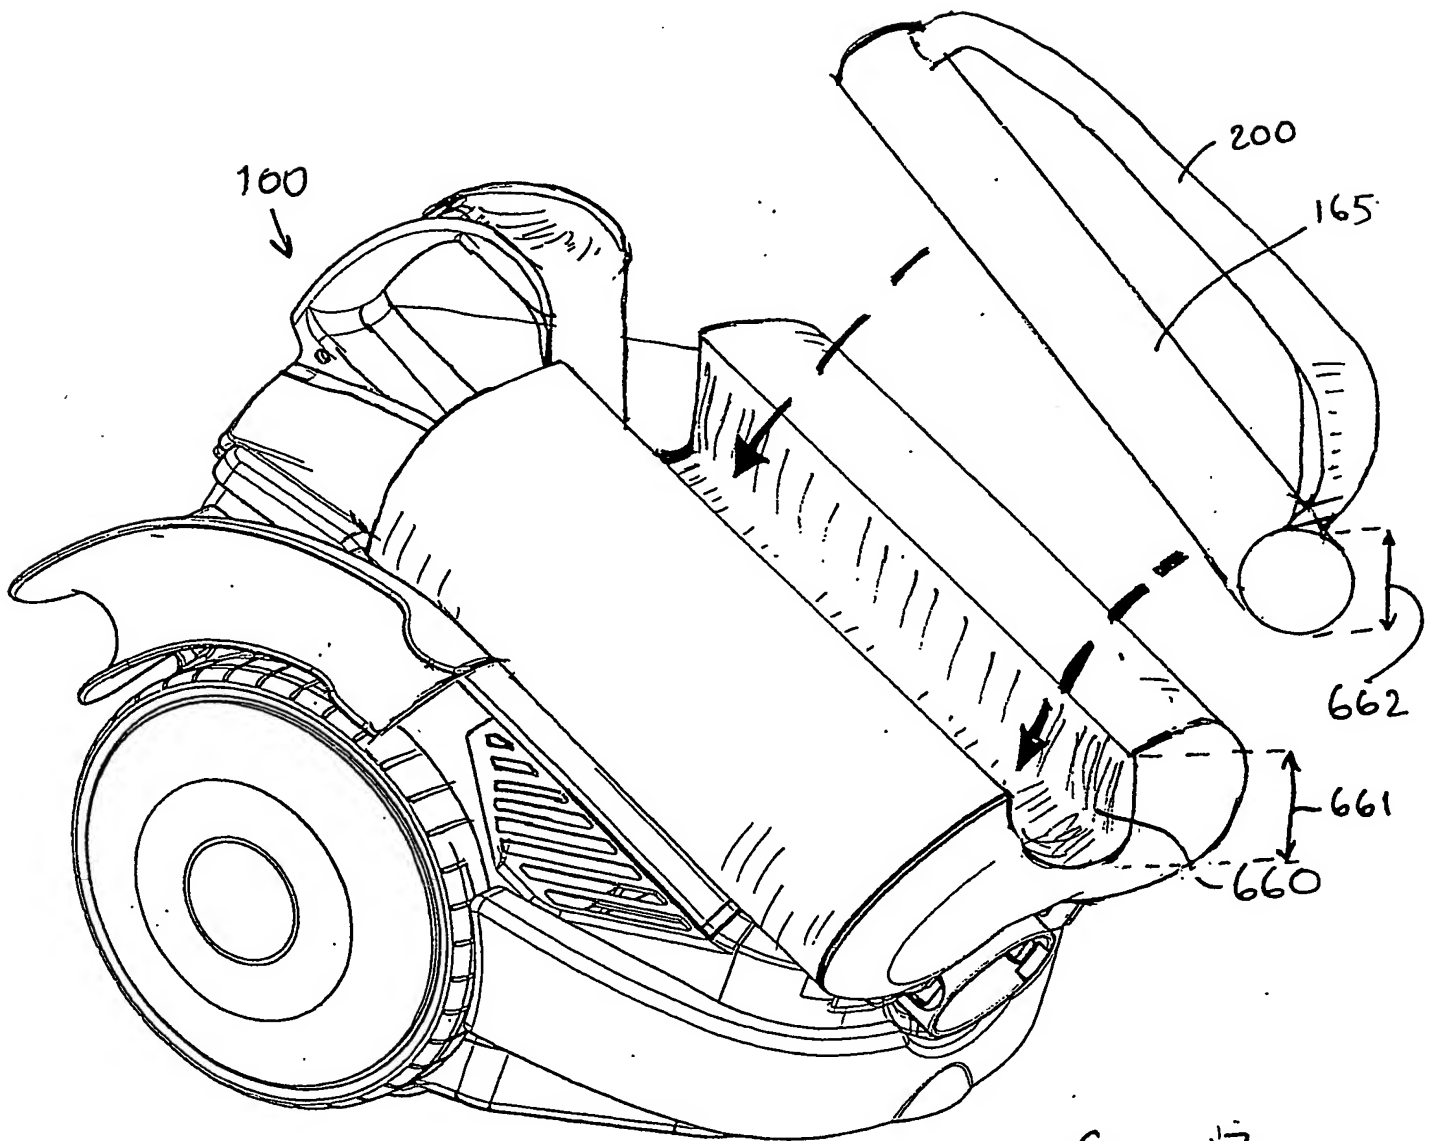


FIG. 17

14/16

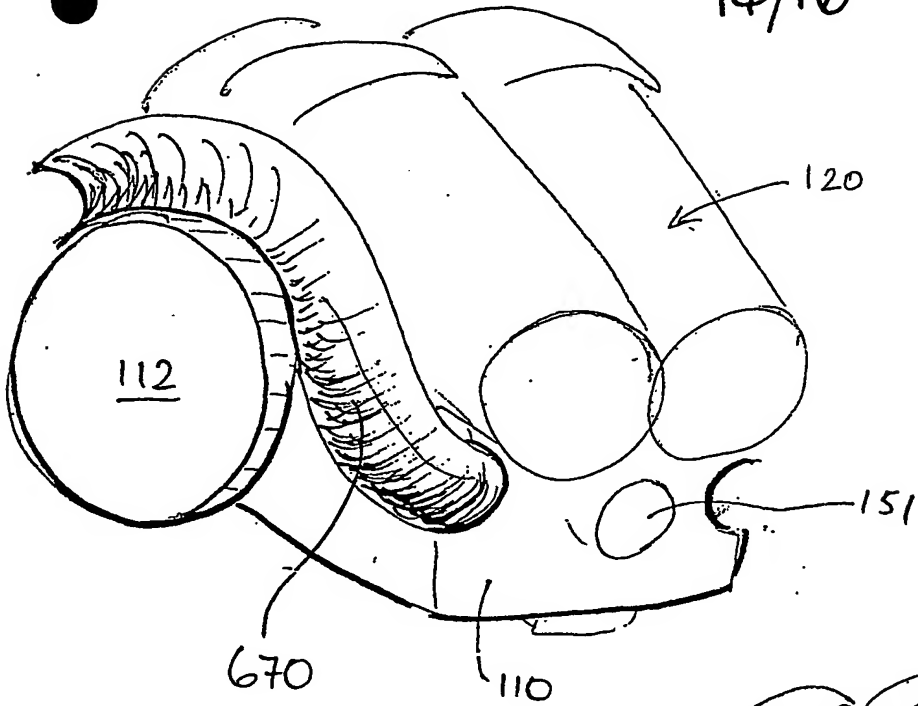


FIG. 18

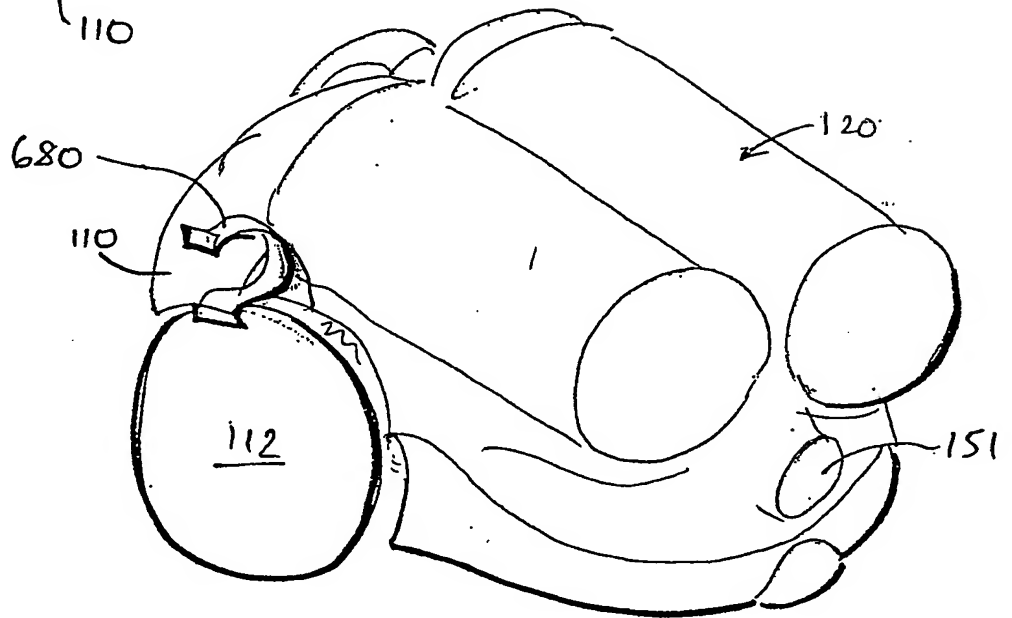


FIG. 19

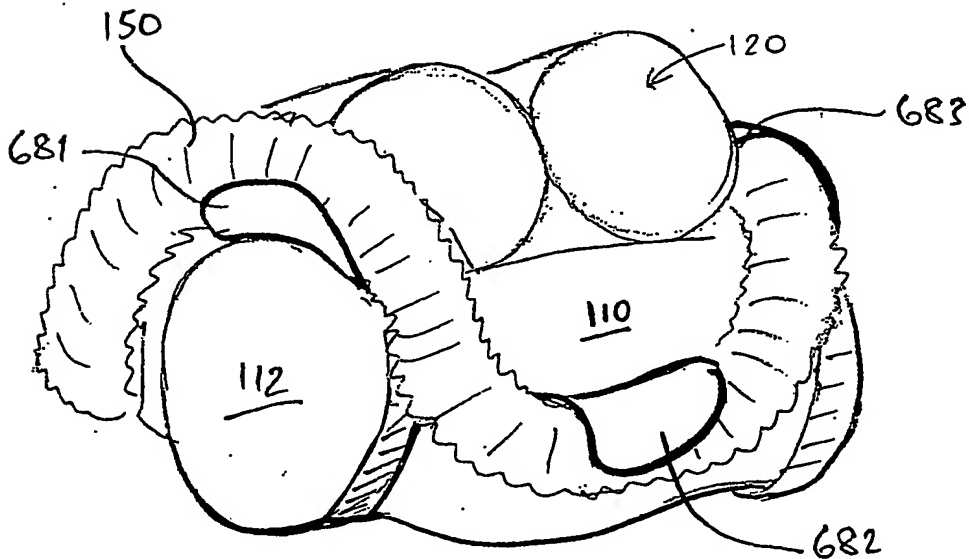


FIG. 23

15/16

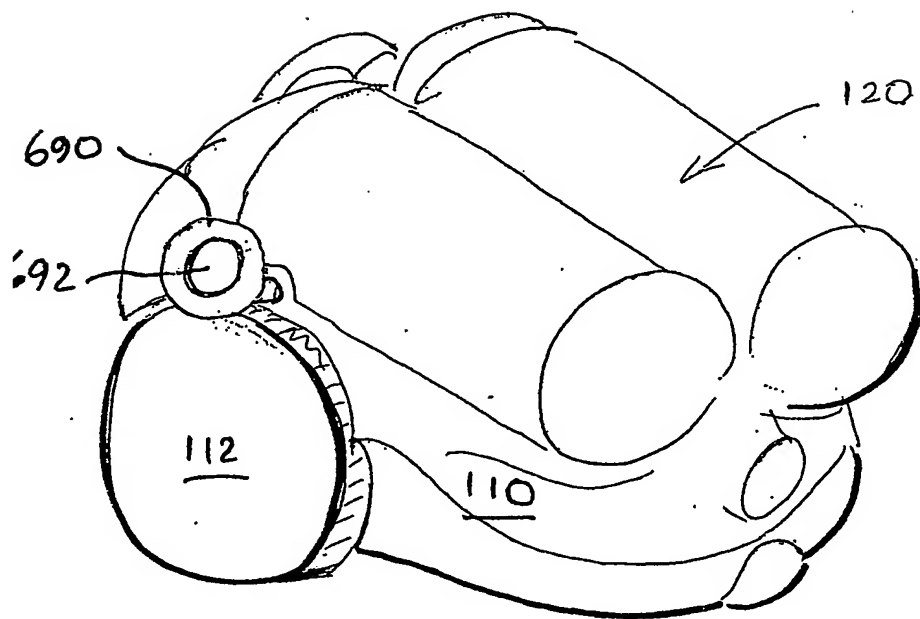


FIG. 21

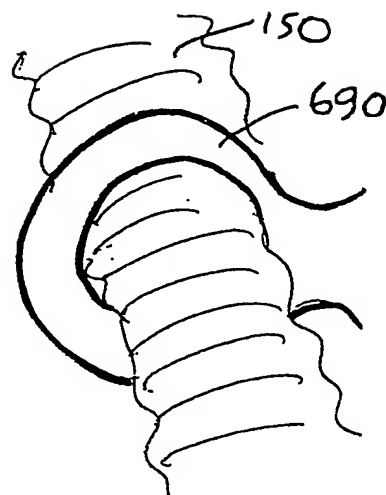


FIG. 22

16/16

FIG. 24

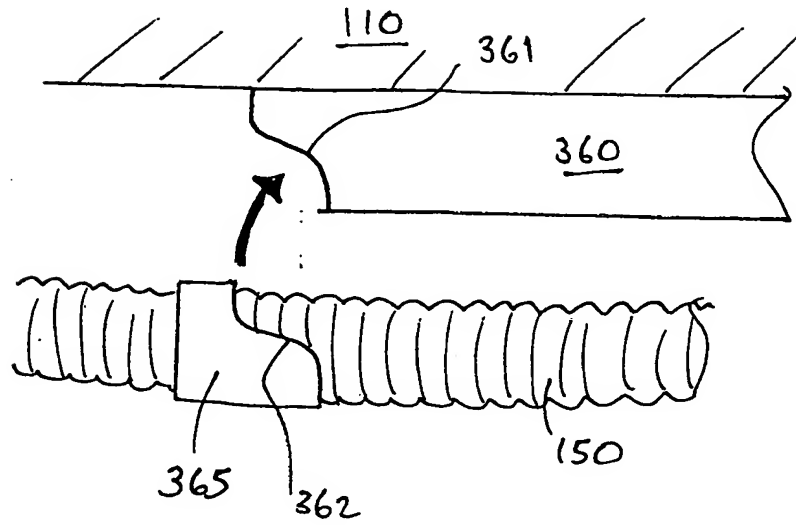


FIG. 25


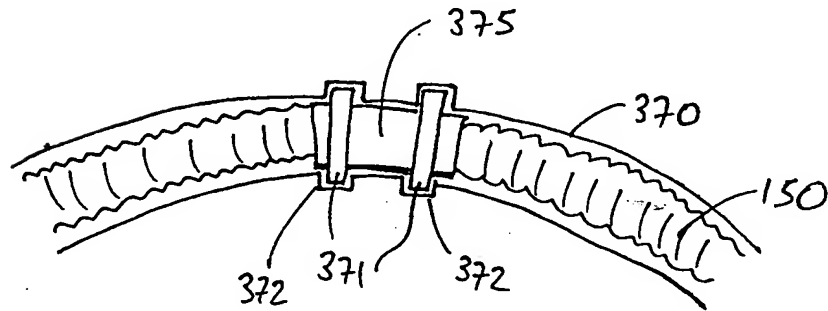


FIG. 26

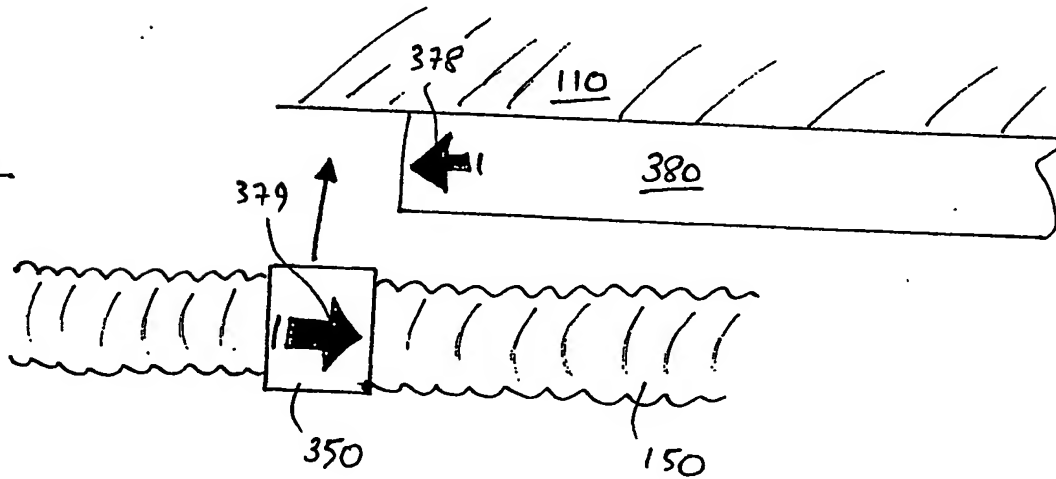

THE PATENT OFFICE

16 SEP 2003

Received in Patents  
International Unit

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**